

INTRODUCTION

Analog product transmits high definition video over a coax-based system, which has attracted the attention of many installers due to its optimum cost performance and friendly usability. Uniview offers a diverse range of analog products tailored to meet the requirements of different scenarios, ensuring both project and personal satisfaction.



PRODUCT FEATURES

- Dolphin** Cost-effective choices for entry-level application
- ColorHunter** technology for 7/24 colorful image
- Plastic housing**, easy to use

High Quality Image


- Balanced brightness** Clearly show rich details to capture accurate information
- ColorHunter** True color restoration Better clarity with lower noise at night



Image performance at day **Image performance at night**

Audio Over Coaxial (AoC)

Two signals transmitting over one cable

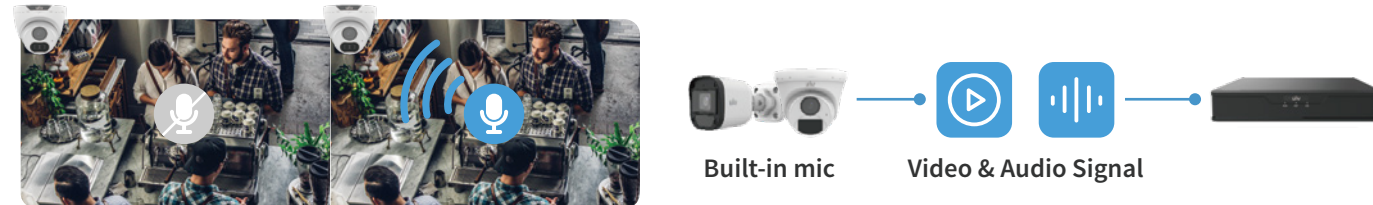

Environmental Suitability (Cameras)

IP 67, complete protection against dust and water. Reliable at instable voltages and extreme temperatures.

- Wide temperature & voltage** -30°C~60°C. **±25% Voltage tolerance**
- Reliable protection level** Waterproof and dustproof protection **IP67**
- Surging prevention** Provide up to 4KV surge protection

Graphene Material

Graphene is applied to the front-face of cameras for a longer life.

Heat Dissipation

Graphene Plastic

Corrosion Resistance

Keep reliable at wide temperature range Reliable in corrosive environment

- Whale** More advanced features for superior performance
- More appearances and resolutions** for wider demands
- Metal housing** for more scenarios

High Quality Image

- 4K** Ultra clarity with rich details
- LightHunter** Clear image in ultra low-light conditions
- WDR** for reliable image excellence

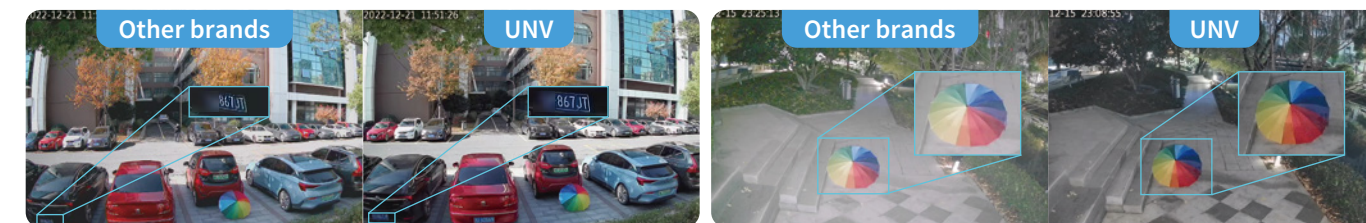



Image performance at day **Image performance at night**




Image performance with WDR 120dB true WDR, ensure reliable image quality in intensive back-light scenarios

DIP Switch

DIP switch equipped for easier configuration of video format.

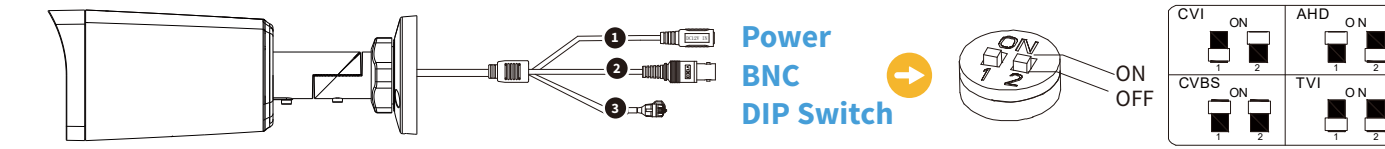

Easy to Configure

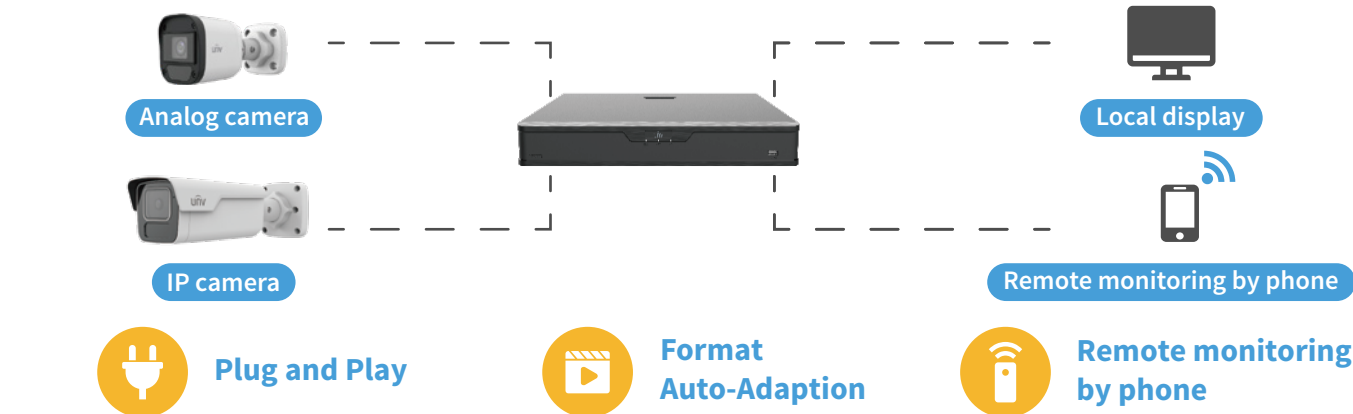

Smart Functions

Smart functions efficiently filters false alarms caused by environmental factors.



UMD(Ultra Motion Detection) With human and vehicle target detection, it solves **2 major pain points:**
 · False detection filtering · Alarm event categorization
 It also simplifies post-event video search, enhancing retrieval efficiency and optimizing disk utilization.

APPLICATION SCENARIOS



PRODUCT LAYOUT

Dolphin

- | | | |
|--|--|---|
| <p>Normal IR</p> <p>UAC-B112-AF28(40)</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m IR range · Built-in mic · IP67 | <p>UAC-T112-AF28(40)</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m IR range · Built-in mic · IP67 | <p>UAC-T132-F28(40)</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m IR range |
| <p>UAC-B115-AF28(40)</p> <ul style="list-style-type: none"> · 5MP@20fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m IR range · Built-in mic · IP67 | <p>UAC-T115-AF28(40)</p> <ul style="list-style-type: none"> · 5MP@20fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m IR range · Built-in mic · IP67 | |
| <p>ColorHunter</p> <p>UAC-B112-F28(40)-W</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · IP67 | <p>UAC-T112-F28(40)-W</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · IP67 | <p>UAC-B112-AF28(40)-W</p> <ul style="list-style-type: none"> · 2MP@25fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · Built-in mic · IP67 |
| <p>UAC-B115-F28(40)-W</p> <ul style="list-style-type: none"> · 5MP@20fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · IP67 | <p>UAC-T115-F28(40)-W</p> <ul style="list-style-type: none"> · 5MP@20fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · IP67 | <p>UAC-B115-AF28(40)-W</p> <ul style="list-style-type: none"> · 5MP@20fps · 2.8/4.0mm, fixed · 4 in 1 output · 20m LED range · Built-in mic · IP67 |
| <p>UAC-P112-AF40-W</p> <ul style="list-style-type: none"> · 2MP@25fps · 4.0mm, fixed · 4 in 1 output · 30m LED range · Built-in mic · IP66 | | |



LightHunter IR

UAC-B122-AF28(40)LM

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67

UAC-T122-AF28(40)LM

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67

UAC-D122-AF28(40)M

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67, IK10

UAC-B124-AF28(40)LM UAC-B125-AF28(40)LM

- 4MP@25fps/5MP@20fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67

UAC-T124-AF28(40)LM UAC-T125-AF28(40)LM

- 4MP@25fps/5MP@20fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67

UAC-D125-AF28(40)M

- 5MP@20fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 30m IR range
- Built-in mic
- IP67, IK10

UAC-B128-ADF128(40)MS

- 8MP@15fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67
- 120dB

UAC-T128-ADF128(40)MS

- 8MP@15fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m IR range
- Built-in mic
- IP67
- 120dB

UAC-D128-ADF128(40)MS

- 8MP@15fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 30m IR range
- Built-in mic
- IP67
- 120dB

ColorHunter

UAC-B122-AF28(40)M-W

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m LED range
- Built-in mic
- IP67

UAC-T122-AF28(40)M-W

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m LED range
- Built-in mic
- IP67

Smart Dual Light

UAC-B142-AF28(40)LM-DL

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m Dual-light
- Built-in mic
- IP67

Smart Dual Light

UAC-T142-AF28(40)LM-DL

- 2MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m Dual-light
- Built-in mic
- IP67

Smart Dual Light

UAC-B145-AF28(40)LM-DL

- 5MP@20fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m Dual-light
- Built-in mic
- IP67

Smart Dual Light

UAC-T145-AF28(40)LM-DL

- 5MP@20fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m Dual-light
- Built-in mic
- IP67

UAC-B134-ADF28(40)MS-W

- 4MP@25fps
- 2.8/4.0mm, fixed
- 4 in 1 output
- 40m LED range
- Built-in mic
- IP67
- 120dB

XVR Product Layout

U3 Series *Designed for common 8MP solution with smart functions and high definition.*

XVR302-08U3

- 2HDDs, 8 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 4ch SIP
- 8ch UMD

XVR302-16U3

- 2HDDs, 16 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 4ch SIP
- 16ch UMD

Q3 Series *Designed for common 5MP and cost-effective 8MP solution with smart functions and high definition.*

XVR301-04Q3

- 1HDD, 4 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 2ch SIP
- 4ch UMD

XVR301-08Q3

- 1HDD, 8 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 2ch SIP
- 8ch UMD

XVR302-16Q3

- 2HDDs, 16 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 4ch SIP
- 8ch UMD

XVR302-32Q3

- 2HDDs, 32 channels
- Input: 8MP@15
- Encoding: 8MP@8
- 4ch SIP
- 16ch UMD

G3 Series *Designed for common 2MP solution and cost-effective 5MP solution.*

XVR301-04G3

- 1HDD, 4 channels
- Input: 5MP@20
- Encoding: 5MP@12
- 4ch UMD

XVR301-08G3

- 1HDD, 8 channels
- Input: 5MP@12
- Encoding: 5MP@6
- 4ch UMD

XVR301-16G3

- 1HDD, 16 channels
- Input: 5MP@12
- Encoding: 5MP@6
- 8ch UMD

F Series *Designed for 2MP solution with ultra low price.*

XVR301-04F

- 1HDD, 4 channels
- Input: 2MP@30
- Encoding: 2MP@15
- 4ch UMD

XVR301-08F

- 1HDD, 8 channels
- Input: 2MP@30
- Encoding: 2MP@15
- 8ch UMD

XVR301-16F

- 1HDD, 16 channels
- Input: 2MP@30
- Encoding: 2MP@15
- 8ch UMD

Analog kit *Combination of cameras and XVR, which is designed for small scheme.*



4+1 Bullet/Turret Kit
One kit includes 4 Analog cameras, 1 XVR and related accessories for easy installation.



8+1 Bullet/Turret Kit
One kit includes 8 Analog cameras, 1 XVR and related accessories for easy installation.

Accessories



PWR-DC1201A(B)-EU

- Input: 100-240V~50/60Hz



PWR-DC1201A(B)-US

- Output: 12V1A



PWR-DC1201A(B)-UK

- Powerline: 1.2m



PWR-DC1201A-IND

- Working environment: 0°C~40°C(32°F ~ 104°F)



TR-WM07P-B

- Applied to Turret & Dome

HIGH-QUALITY ANALOG YOU CAN TRUST

ANALOG PRODUCTS



Headquarters

No.369 Xietong Road, Binjiang District,
Hangzhou 310051, China
Sales: overseasbusiness@uniview.com
Technical Support: globalsupport@uniview.com

global.uniview.com



HIGH-QUALITY ANALOG YOU CAN TRUST ANALOG PRODUCTS

