

# 5MP OwlView ColorHunter with Wise-ISP Fixed Warm Light Bullet Network Camera

IPC225LE-AF40(60)C-WP



## Key Features



- High quality image with 5MP, 1/1.8"CMOS sensor and F1.0 large aperture lens
- 5MP (2880\*1620)@25/20fps; 4MP (2560\*1440)@ 25/20fps; 3MP (2304\*1296) @30/25fps; 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264
- Colorhunter with Wise-ISP technology ensures 24-hour full-color images
- Built-in Mic
- Built-in Speaker
- Warm Light, up to 50m white light distance
- IP67 protection

## Specifications

	IPC225LE-AF40C-WP			IPC225LE-AF60C-WP	
Camera					
Sensor	1/1.8", 5.0 megapixel, progressive scan, CMOS				
Minimum Illumination	Colour: 0.0003Lux (F1.0, AGC ON) 0 lux with LED on				
Shutter	Auto/Manual, 1 ~ 1/100000s				
WDR	DWDR				
S/N	>52dB				
Lens					
Lens	4.0mm@F1.0			6.0mm@F1.0	
Iris	Fixed				
Field of View (H)	88.2°			61.8°	
Field of View (V)	47.6°			33.5°	
Field of View (D)	104.0°			71.0°	
DORI					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	4.0	62.1	24.8	12.4	6.2
	6.0	93.1	37.2	18.6	9.3
Illuminator					
LED Range	Up to 50m (164 ft)				
LED On/Off Control	Auto/Manual				
Video					
Video Compression	Ultra 265, H.265, H.264				
Frame Rate	Main Stream: 5MP (2880*1620), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream:2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps; 640*360,Max 30fps;				
U-code	Support				
OSD	Up to 4 OSDs				
ROI	Up to 8 areas				
Video Stream	Dual streams				
Image					
White Balance	Manual/Auto				
Digital noise reduction	2D/3D DNR				
Gain	Auto / Manual				
HLC	Support				
Events					
Basic Detection	Human body detection, Motion detection, Audio detection				
Audio					
Audio Compression	G.711U, G.711A				
Audio Bitrate	64 Kbps				
Two-way Audio	Support				
Suppression	Support				
Sampling Rate	8KHZ				

## Network

Protocols	IPv4,TCP,UDP,DHCP,RTP,RTSP,DNS,DDNS,NTP,UPnP,HTTP,RTCP,RTMP,IGMP,ICMP
Compatible Integration	ONVIF, API

## Interface

Audio I/O	N/A
Alarm I/O	N/A
RS485	N/A
Built-in Mic	Support
Built-in Speaker	Support
WIFI	N/A
Network	1 * RJ45 10M/100M Base-TX Ethernet
Video Output	N/A


## Certifications

Protection	IP67 (IEC 60529)
------------	------------------

## General

Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 6.0W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (L × W × H)	225 × 111 × 134mm (8.9" × 4.3" × 5.3")
Weight	0.49kg (1.08lb)
Material	Graphene + Plastic
Surge Protection	4KV

## Dimensions

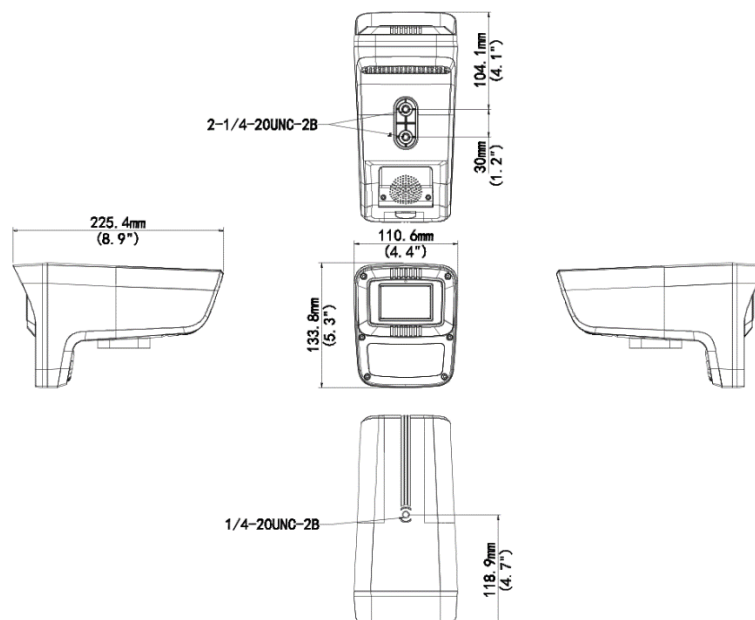

**Zhejiang Uniview Technologies Co., Ltd.**

Building No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China, 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.