

# 55" 1.7mm Bezel Width Video Wall

MW-A55-B3-E



## Features


- Industrial-grade panel, highly reliable integrated structure design, continuous stable operation.
- Direct-lit LED backlight provides high brightness uniformity without border shadows.
- Ultra-narrow 1.7 mm seam.
- Supports white balance adjustment, delivering delicate and colorful images.
- Wide 178 viewing angles.
- Built-in image splicing function.
- Support anti-burn technology, landscape and portrait installation.
- Supports delayed boot after power on.
- Advanced direct-lit local dimming technology with low power consumption, saving energy.
- Metal case protects the unit from interference of radiation, magnetic fields, and strong electric fields.
- Support remote control and RS232 hoop control.
- Mounting kit included
- Equipped with HDMI input Interfaces and HDMI loop out Interface, support video signal loop out display.
- Up to 4K@60Hz signal input by DP IN or HDMI interface, up to 4K@60Hz signal output by HDMI OUT interface.
- Compliant with HDCP2.3, HDCP2.2 and HDCP1.4.

## Specifications

Panel	Description
Panel Size	55"
Resolution	1920 × 1080
Aspect Ratio	16:9
Bezel Width	B2B: 1.7 mm (Panel to Panel , Without Bezel), 0.9 mm (T/L), 0.8 mm (B/R) A2A: 2.45 mm (Active area to Active area), 1.5 mm (T/L), 0.95 mm (B/R)
Color Support	16.7 M
Brightness (cd/m <sup>2</sup> )	700
Contrast Ratio	Typical 4000:1, Dynamic 50000:1
Response Time (ms)	8
Viewing Angle (H/V)	178°/178°
Surface Treatment	Haze25% ,2H, (Front Polarizer)
Pixel Density	40ppi
Display Size (mm)	1209.6 (H) mm × 680.4 (V) mm
Color Gamut	72%NTSC
Refresh Rate	60 Hz
LCD Technology/Panel Type	ADS
Pixel Pitch (H x V) (mm)	0.21 x 0.63
Operation Hour	24/7
Interface	Description
Video Input	1 x HDMI, 1 x DVI, 1 x VGA, 1 x CVBS, 1 x DP
Video Output	1 x HDMI
Other Interfaces	1 x USB 2.0, 2 x RS232, 1 x IR interface, 2 x 3.5mm Mini Jack, 1 x RJ45
OSD	Description
Multi-Language	English, Simplified Chinese
General	Description
Speakers	2 x 10W
Input Voltage	AC 100 ~ 240 V, 50/60 Hz
Typical Power Consumption (W)	230
Product Dimensions (W x H x D)	1212.7 x 683.5 x 125

(mm)	
Package Dimensions (W x H x D) (mm)	1325 x 815 x 205
Weight (Kg)	Net Weight: 25 Gross Weight: 29.7
Operating Temperature	0℃ ~ 40℃
Operating Humidity	20% ~ 90% (No Condensation)
Storage Temperature	-20℃ ~ 60℃
Storage Humidity	10% ~ 90% (No Condensation)
Standard	1 x Remote Control, 1 x Power Cable, 1 x Ground Wire, 1 x Infrared Extension Cable, 1 x Network Cable, 1 x Quick Guide
Lifetime (h)	50000
MTBF	50000h
Color Temperature	10000K
Material	SECC
Certificate	CE, FCC, RoHS, Class A

## Dimensions

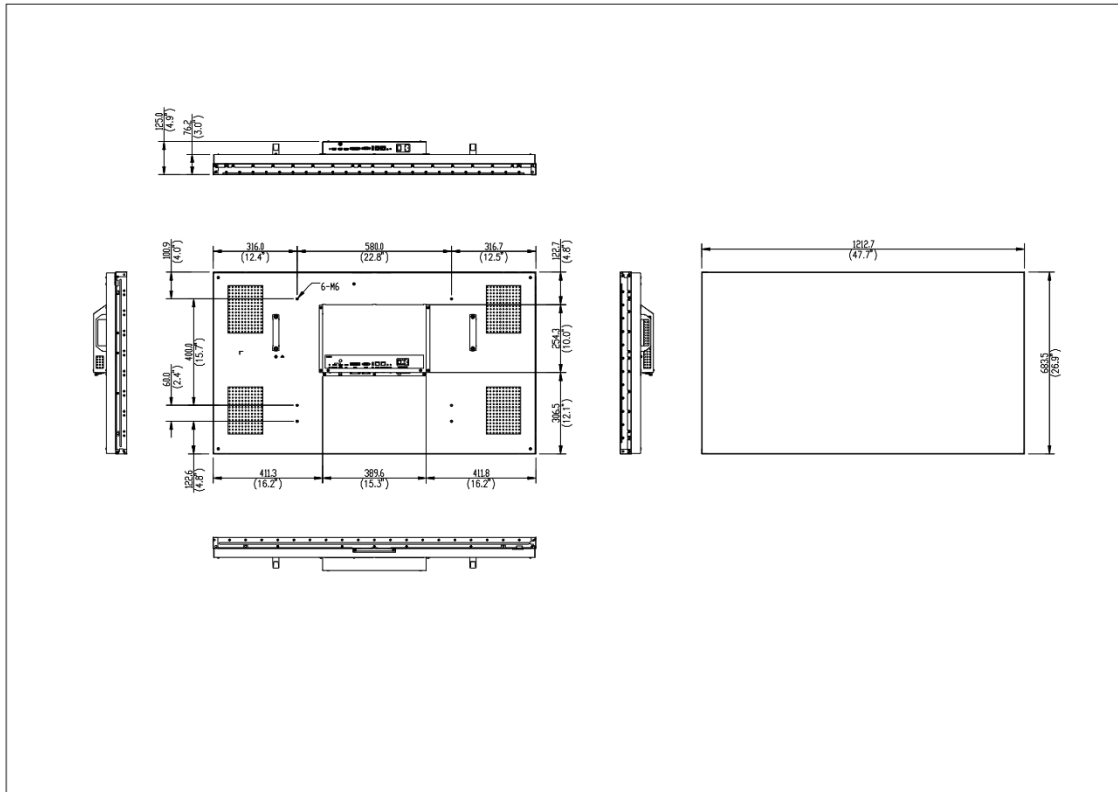

## Ordering Info

Product Model	Description
MW-A55-B3-E	55" 1.7mm Bezel Width Video Wall

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.