

EZTools 3.0

User Manual

User Manual: V1.11

Disclaimer and Safety Warnings

Copyright Statement

©2011-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

No part of this manual may be copied, reproduced, translated or distributed in any form or by any means without prior consent in writing from Zhejiang Uniview Technologies Co., Ltd (referred to as Uniview or us hereafter).

The product described in this manual may contain proprietary software owned by Uniview and its possible licensors. Unless permitted by Uniview and its licensors, no one is allowed to copy, distribute, modify, abstract, decompile, disassemble, decrypt, reverse engineer, rent, transfer, or sublicense the software in any form or by any means.

Trademark Acknowledgements

 are trademarks or registered trademarks of Uniview.

All other trademarks, products, services and companies in this manual or the product described in this manual are the property of their respective owners.

Export Compliance Statement

Uniview complies with applicable export control laws and regulations worldwide, including that of the People's Republic of China and the United States, and abides by relevant regulations relating to the export, re-export and transfer of hardware, software and technology. Regarding the product described in this manual, Uniview asks you to fully understand and strictly abide by the applicable export laws and regulations worldwide.

Privacy Protection Reminder

Uniview complies with appropriate privacy protection laws and is committed to protecting user privacy. You may want to read our full privacy policy at our website and get to know the ways we process your personal information. Please be aware, using the product described in this manual may involve the collection of personal information such as face, fingerprint, license plate number, email, phone number, GPS. Please abide by your local laws and regulations while using the product.

About This Manual

- This manual is intended for multiple product models, and the photos, illustrations, descriptions, etc. in this manual may be different from the actual appearances, functions, features, etc. of the product.
- This manual is intended for multiple software versions, and the illustrations and descriptions in this manual may be different from the actual GUI and functions of the software.
- Despite our best efforts, technical or typographical errors may exist in this manual. Uniview cannot be held responsible for any such errors and reserves the right to change the manual without prior notice.
- Users are fully responsible for the damages and losses that arise due to improper operation.
- Uniview reserves the right to change any information in this manual without any prior notice or indication. Due to such reasons as product version upgrade or regulatory requirement of relevant regions, this manual will be periodically updated.

Contents

1 Introduction	1
2 Project Management	2
2.1 Add Project	2
2.2 Switch Project	3
2.3 Manage Projects	3
3 Device Management	3
3.1 Add Device	4
3.1.1 Save Device from Default Project	4
3.1.2 Auto Search	4
3.1.3 Add Device Manually	5
3.2 Basic Operations	6
3.2.1 Edit Device	6
3.2.2 View Device Details	6
3.2.3 Configure Cloud Service	7
3.2.4 Access Device's Web Interface	8
3.2.5 Play Live Video	8
3.2.6 Delete Device	8
3.3 Change Device Password	9
3.4 Modify Network Parameters	9
3.4.1 Modify IPv4 Address	9
3.4.2 Modify IPv6 Address	11
3.5 System Configuration	12
3.5.1 Restart Device	12
3.5.2 Restore Defaults	12
3.5.3 Restore Factory Defaults	12
3.5.4 Device Maintenance	12
3.6 Export Device List	13
3.7 Other Operations	13
3.7.1 Select Multiple Devices	13
3.7.2 Refresh Device List	13
3.7.3 Filter Devices	13
3.7.4 Sort Devices	14
3.7.5 Clear Devices	14

4 Device Configuration	14
4.1 Basic Operations	14
4.2 Basic Configuration	14
4.3 Advanced Configuration	19
4.4 Modify Device Names	26
4.5 Modify OSDs	27
4.6 Building Configuration	28
4.7 Server Config	30
4.8 Display and Control Configuration	30
4.9 EZCfgTools	31
5 NVR Channel Management	33
5.1 Add NVR Channel	33
5.2 Delete NVR Channel	34
6 Capacity Calculation	34
6.1 Add Devices for Calculation	34
6.2 Calculate Retention Time	35
6.3 Calculate Disks Needed	37
6.4 Other Operations	39
7 Upgrade Center	40
7.1 Upgrade Configuration	40
7.2 Solution Upgrade	40
7.2.1 Deployment Scenario (WAN)	41
7.2.2 Deployment Scenario (LAN)	43
7.2.3 Non-Deployment Scenario (WAN)	43
7.2.4 Non-Deployment Scenario (LAN)	45
7.2.5 Export Upgrade Report	46
7.3 Custom Upgrade	46
7.3.1 Upgrade Device	46
7.3.2 Upgrade Channel	48
7.3.3 Cancel Upgrade	48
7.3.4 Export Upgrade Report	49
8 Client Configuration	49
9 Application Center	50

1 Introduction

This tool is used to manage and configure IPCs, NVRs, display control devices, access control devices, door stations, indoor stations, etc. on local area network (LAN). Major functions are listed in the table below.



NOTE!

- Display control devices only support login, [changing password](#), [modification of network parameters](#), and [local upgrade](#). EC encoders also support channel configuration.
- Indoor stations do not support [changing password](#), [restarting](#), [restoring defaults](#), [restoring factory defaults](#), [importing/exporting configuration](#), [basic configuration](#).
- The MAC version does not support OSD, motion detection, application center, and QR code-related features.

Item	Function
Project Management	Create projects and manage devices by project.
Add Device	• Save Device from Default Project • Auto Search: Automatically searches for devices within a specified network segment. • Add Device Manually: Searches for a device with a known IP address.
Basic Operations	Basic operations include: • Edit device settings • View device details • Configure the cloud service • Access a device's web interface • Export device list
Change Device Password	Change a device's login password.
Modify Network Parameters	Modify a device's network parameters.
System Configuration	System configuration include: • Restart device • Restore defaults • Restore factory defaults • Perform device maintenance
Device Configuration	• Basic Configuration: Configure the device name, system time, network, DNS, port, SNMP and ONVIF for a device. • Advanced Configuration: Configure image, encoding, OSD, audio, and motion detection for a channel.
NVR Channel Management	Adds or deletes cameras connected to an NVR (also referred to as NVR channels).
Capacity Calculation	Calculates the required hard disk space, number of hard disks, and recording time.
Upgrade Center	• Solution Upgrade: Upgrade the versions of devices within the solution based on the solution matching relationship. This function is only available for devices that have been added to the client. • Custom Upgrade: Select devices for upgrade as needed. Template upgrade, online upgrade, and file upgrade are supported.

Application Center	Provides a portal through which users can conveniently download, install, and upgrade other applications.
------------------------------------	---

Note: Before you start, make sure your devices and the computer running this tool are connected by a network.

Interface Global Operations

- Click the buttons in the top right corner:

Icon	Description
English ▾	Switch the client language.
	Client Configuration .
	View user manual, FAQs, open source notices and update information.
 Switch to Lite Mode	Switch to Lite Mode or Pro Mode. Lite Mode: Simplified features, easy to operate. Does not support project management, manual addition or deletion of devices, nor solution upgrades. Pro Mode: Complete layout and full functionality, designed for advanced configuration and management needs. Note: The feature descriptions and screenshots in this document are based on Pro Mode.

- To resize the interface, press and hold the left mouse button on  at lower-right corner and drag to the desired size.

2 Project Management

Create projects and manage devices by project.

The system includes a default project that automatically searches for and adds devices each time the client is launched. You can create new projects and save devices from the default project to your custom projects.

2.1 Add Project

- Click  next to **Project Management** in the upper-left corner.

Add Project
×

* Project Name


Remarks

Cancel
OK

- Set a custom project name and enter remarks as needed.
- Click **OK**.

2.2 Switch Project

Select a project from the drop-down list in the upper-left corner to enter the project. Functions within the tool are only applicable to the devices in the selected project.

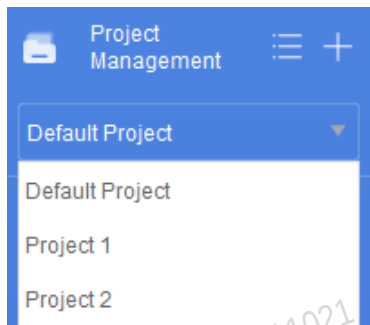

NOTE!

Switching the project will interrupt the ongoing upgrade or download task(s).

2.3 Manage Projects

Click  next to **Project Management** to view the existing projects. You can perform operations such as add, edit, and delete.

Project List						
 Add Project		 Delete		Please enter keywords 		
☒	Project Name	Device Count	Creation Time	Last Modified Time	Remarks	Operation
☐	Project 1	23	2024-09-12 09:58:41	2024-10-22 21:16:23	5	  
☐	Project 2	39	2024-09-12 09:59:59	2024-10-22 21:16:35	8	  

- Edit project: Click  in the **Operation** column. The **Project Name** and **Remarks** columns will be editable. After making your changes, click on any blank area within the project list to save your modifications.
- Delete project: Click  in the **Operation** column or select project(s) and click **Delete**.
- Switch Project: Click  in the **Operation** column to switch to the project.
- Add project: Click **Add Project**, set a custom project name and enter remarks as needed, and then click **OK**.

3 Device Management

Add devices to projects for basic configuration.


3.1 Add Device

Choose a method to add devices.

3.1.1 Save Device from Default Project

Save devices from the default project to a custom project.

1. Go to the default project to view the devices added via auto search.
2. Select device(s) you want to save (all devices will be saved if none are selected).
3. Click **Save Device** in the upper-right corner.

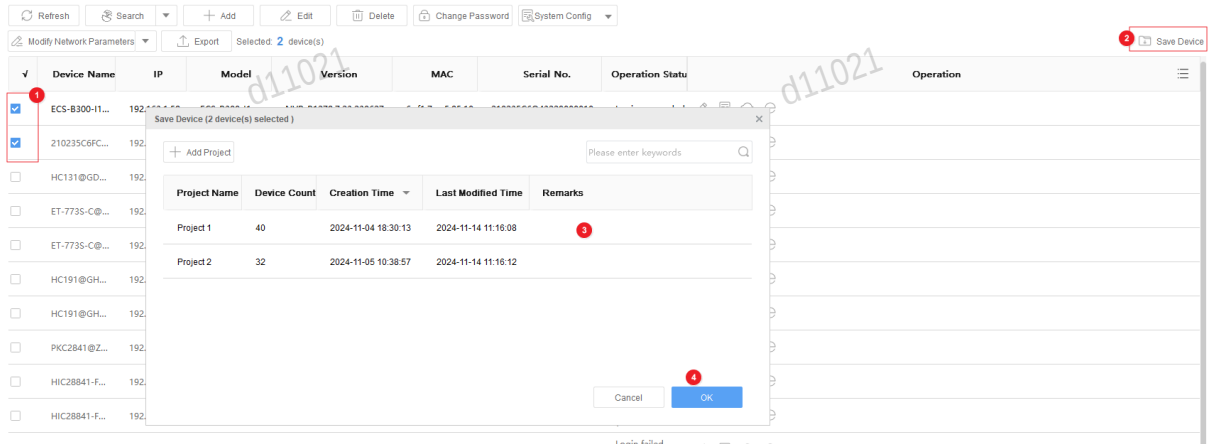

4. Select a destination project and click **OK**. The selected device(s) will be added to the designated project.




NOTE!


A device can be saved to multiple projects.

3.1.2 Auto Search

Set network segments for automatic search. The system can automatically search for and add devices within the specified network segments.

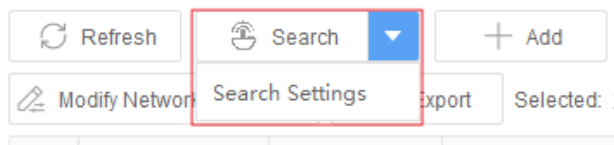

1. Click ▼ next to **Search** and select **Search Settings**. Complete the settings and click **OK**.

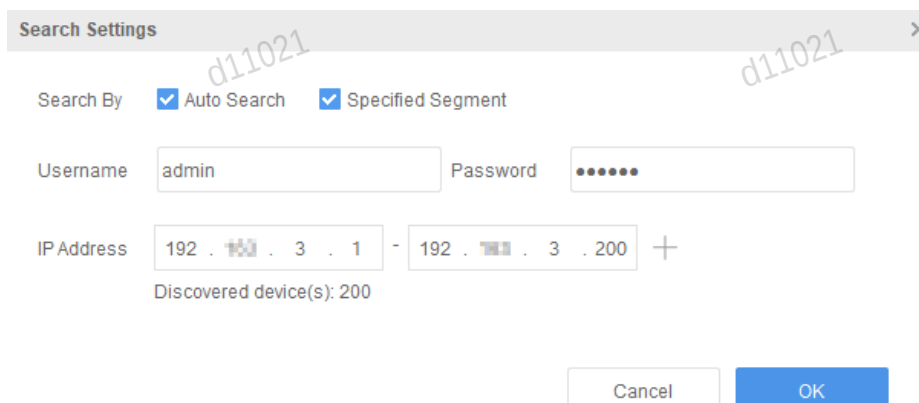

Item	Option	Description
Search Mode	Auto Search	The default mode. This mode searches for devices within the same network segment as the PC. Specifying network segments manually is not supported.
	Specified Segment	- Specify an IP segment, and the system will immediately detect the number of devices within the segment. - Click + to add a network segment. Up to 40 segments are allowed.
Username/Password		Enter the device's actual login username and password. The default username/password is admin/123456.

- Click **Search**. The system will automatically search for and add devices within the corresponding segments and log in to the device.



NOTE!

When you modify the search settings and conduct a new search, newly discovered devices will be added additionally without affecting the previously added devices.

3.1.3 Add Device Manually

If the device IP or IP segment is known, you can add the device manually.

- Click **Add**. A page as shown below appears.

- Choose a way to add devices.
 - By IP: Enter the device IP address, port number, username, and password to add a device.
 - By IP range: Enter the IP range, port number, username, and password to add all devices within the IP address range.
 - Import File: Click **Export** to export the template, then complete device information in the template, and import the template to add the devices specified in the file. A message appears when the import is completed. If a device failed to be added, you can click **View Failure Details** to see the cause of failure. You can modify settings and then import again.
- (Optional) Check **Add Offline Device** to add offline devices to the device list. The device information will not be verified when they are added to the device list; it will be verified when you configure the devices.

4. Click **OK**.

3.2 Basic Operations

3.2.1 Edit Device

Edit the device username and password saved by the tool. The username and password will be used to access the device during subsequent configuration.

Choose a way to change the device username and password.

Refresh

Search

Add

Edit

Delete

Change Password

System Config

Modify Network Parameters

Export

Selected: 2 device(s)

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status	Operation
☒	ECS-B300-11...	192.168.1.58	ECS-B300-11	NVR-B12...	6cf1f1e1:85:10	210235C...	Login succeeded	
☒	210235C6FC...	192.168.1.78	DSM3002-HI-X	B2102.11.5.40531	c4:79:00:07:89:14	210235C...	Login failed (inc...	

- Edit devices in batches: Select the devices you want to edit, click **Edit**. A dialog box appears. Enter the new username and password, and then click **OK**.
- Edit one device: In the **Operation** column, click for the device you want to edit. A dialog box appears. Enter the new username and password, and then click **OK**.



NOTE!

After modification, the device will log in automatically.

3.2.2 View Device Details

Click in the **Operation** column to view device details, including device name, model, time, serial number, version information, and IP address.



NOTE!

Only IPC and NVR devices support viewing the device time.

Details

Device Name:

IPC3734

Device Model:

IPC3734SE-AD000-10

Device Time:

2026-05-15 15:26:38

Serial No.:

210235C...

Version:

Q...

MAC:

88:...

Port:

80

IP:

192.117.3.159

Subnet Mask:

255.255.255.0

Gateway:

192.117.3.1

Close

3.2.3 Configure Cloud Service

Enable/disable cloud service and the add without signup function.


- After enabling the cloud service, you can add the device to your cloud account. Then, you can use the device by logging in to your cloud account in other applications, without the need to repeatedly add the device.
- When the add without signup function is enabled, you can add and use a device using the corresponding app, without the need to sign up for a cloud account.



NOTE!

- For the Windows version, please choose and download the accompanying APP in [Application Center](#).
- The MAC version does not provide application center or QR code; please download the APP from the App Store or by scanning the register code on the device body or through other channels.
- The management station does not support this function.

Click  in the **Operation** column. A page as shown below appears.

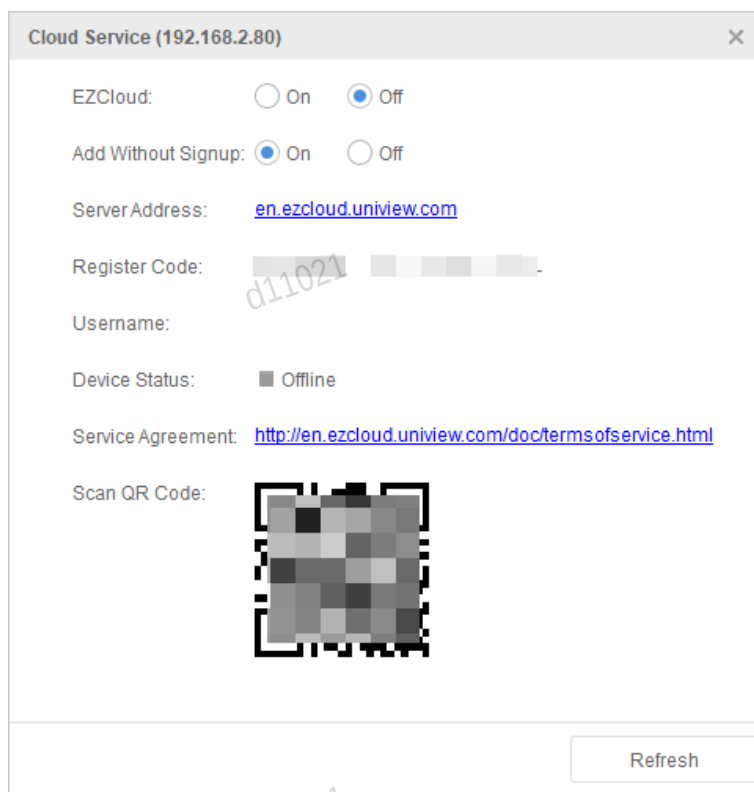

- Enable or disable the cloud (EZCloud) service for the device.
When the cloud service is enabled, you can log in to your cloud account in the app and use the app to scan the QR code to add the device. If the device status is displayed as “online”, it indicates the device is connected to the cloud server and can be added to your cloud account.



NOTE!

After enabling or disabling the cloud service, you need to click **Refresh** to update the device status.

- Enable or disable the add without signup function for the device.

When enabled, you can use a corresponding app to scan the QR code below to add the device. This enables you to access the device remotely from a mobile phone without requiring you to sign up for a cloud account.



NOTE!

The add without signup function requires that the device has enabled cloud service and set a strong password.

- Delete device: To remove a device from your cloud account, click **Delete**. This operation does not affect using the device in the tool.

3.2.4 Access Device's Web Interface


Click  in the **Operation** column to open the login page on the device's web interface.

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status	Operation
☒	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B12711230627	6cf1:7777:85:10	210235C6FC11000010	Login succeeded	   
☒	210235C6FC...	192.168.1.78	DSM3002-HI-X	B2102.11.5.40531	c4:75:00:07:89:14	210235C6FC11000006	Login failed (inc...	    

3.2.5 Play Live Video

1. Click  in the **Operation** column to view the live video of an online IPC or access control device.

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status	Operation
☒	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B12711230627	6cf1:7777:85:10	210235C6FC11000010	Login succeeded	   
☒	210235C6FC...	192.168.1.78	DSM3002-HI-X	B2102.11.5.40531	c4:75:00:07:89:14	210235C6FC11000006	Login failed (inc...	    

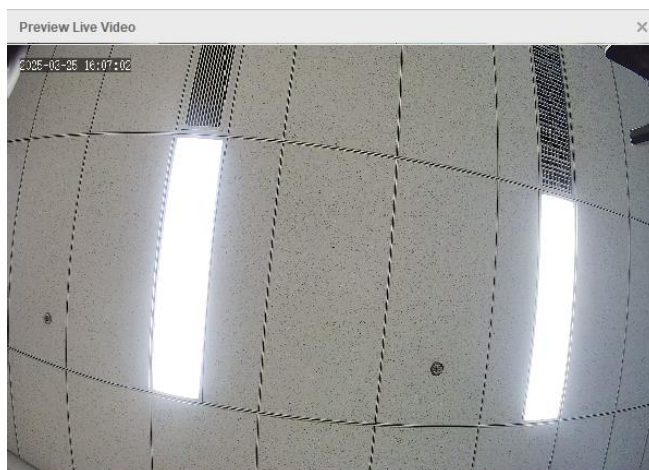

NOTE!

For dual-channel/multi-channel cameras, the channel 1's live view image will be displayed.

2. (Optional) Double-click the image to play in full screen.

3.2.6 Delete Device

Select the devices you want to delete, and then click **Delete** on the top to delete the devices from the device list.

Refresh

Search

+ Add

Edit

Delete

Change Password

System Config

Modify Network Parameters

Export

Selected 2 device(s)

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status	Operation
☒	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B12...	6cf1:7e:11:85:10	210235C...	Login succeeded	
☒	210235C6FC...	192.168.1.78	DSM3002-HI-X	B2102.1...	c4:79:00:07:89:14	210235C...	Login failed (inc...	

3.3 Change Device Password

Change the login password for a device. After the password is changed, you need to use the new password to access the device's web interface.

1. Select the target device, and then click **Change Password**.



NOTE!

If you select multiple devices to change passwords, make sure that the usernames and original passwords of the selected devices are the same.

2. On the page as shown below, enter the device's username, old password and new password.

Manage Device Password (192.168.1.78) ×

* Username

* Old Password

* New Password

Weak Medium Strong

* Confirm

Email

OK

Cancel

3. (Optional) Enter an email address for the device. The entered email address can be used to receive a security code that is used to reset the device password in case you forget it.
4. Click **OK** to save the new password.

3.4 Modify Network Parameters

Modify network parameters for devices, including IPv4 and IPv6 addresses.



NOTE!

The management station does not support this function.

3.4.1 Modify IPv4 Address

You can modify the IPv4 address on the Web interface or in batches using a template.

1. Select the device, and then click **Modify Network Parameters**.
2. Select **IPv4**.
3. You can select **Static** or **DHCP**.

Modify IP (2 device(s) selected)

Parameter: ☒ IPv4 ☐ IPv6 (only for IPC) Mode: ☒ Static ☐ DHCP

IP Range: 192 . 112 . 1 . 188 — 192 . 112 . 1 . 189 Subnet Mask: 255 . 255 . 255 . 0

Gateway: 192 . 112 . 1 . 1

Edit Password

✓	IP(old)	IP(new)	Subnet Mask	Gateway	Username	Password	Device Type	Device Status
☐	192.112.1.188	192.112.1.188	255.255.255.0	192.112.1.1	admin	••••••	IPC	Logged in
☐	192.117.3.159	192.112.1.189	255.255.255.0	192.112.1.1	admin	••••••	IPC	Logged in

Cancel OK

- Static: Enter the IPv4 (for multiple devices, enter an IPv4 address range), subnet mask, and gateway.
- DHCP: IPv4 address will be assigned dynamically.

- You can double-click on cell to modify the new IPv4, subnet mask, gateway, username, and password as needed.



NOTE!

The username and password are for verification purposes. Incorrect username or password will cause the network parameter modification to fail. You can select devices and click **Edit Password** to modify login passwords in batches.

- Click **OK**. Check the **Device Status** column to see whether the modification is successful.

Batch Import Modifications

- Select devices, click ▼ next to **Modify Network Parameters**, and then select **Batch Import Modifications**.

Modify Network Parameters ▼ Export Selected: 2 device(s)

Batch Import Modifications

	Device Name	IP	Model	Ve
☒	192.115.1.245	192.115.1.245	NVR-S300-I16...	NVR-B5213
☒	IPC-E244-FW...	192.117.1.242	IPC-E244-FW@...	CIPC-B2302

Modify IP

Export Config Export

Import File Browse

OK Cancel

- Click **Export** to export the information of the selected devices into a file.
- Fill in the new IP address, subnet mask, gateway, username, and password for each device in the file. Then, save the modified file.

	A	B	C	D	E	F	G	H	I	J
1	IP(old)	Serial No	MAC	Device Ty	Port	IP(new)	Subnet Ma	Gateway	Username	Password
2	192.115.121	10235C8Jc	4:79:05:	101	80	192.115.125	255.255.0	192.167.1	admin	Admin123.
3	192.117.121	10235C6Fc	4:79:05:	1	80	192.117.125	255.255.2	192.117.1	admin	admin_123

- Click **Browse** to upload the modified file.
- Click **OK**.

3.4.2 Modify IPv6 Address

You can manually modify IPv6 addresses on the interface.



NOTE!

Only IPC supports configuring IPv6 address.

- Select the device, and then click **Modify Network Parameters**.
- Select **IPv6**.
- You can select **Static** or **DHCP**.

Modify IP (2 device(s) selected)

Parameter:

☐ IPv4
 ☒ IPv6 (only for IPC)

Mode:

☒ Static
 ☐ DHCP

IP Range:

—

Prefix Length:

Gateway:

Edit Password

✓	IP(old)	IP(new)	Prefix Length	Gateway	Username	Password	Device Typ	Device Status
☐	-	-	64	-	admin	••••••	IPC	Modification f
☐	-	-	64	-	admin	••••••	IPC	Modification f

Cancel

OK

- Static: Enter the IPv6 (for multiple devices, enter an IPv6 address range), subnet mask, and gateway.
 - DHCP: IPv6 address will be assigned dynamically.
- You can double-click on cell to modify the new IPv6, subnet mask, gateway, username, and password as needed.



NOTE!

The username and password are for verification purposes. Incorrect username or password will cause the network parameter modification to fail. You can select devices and click **Edit Password** to modify login passwords in batches.

- Click **OK**. Check the **Device Status** column to see whether the modification is successful.

3.5 System Configuration

3.5.1 Restart Device

Select the devices you want to restart, click **System Config > Restart Device**, and then confirm.

The screenshot shows the 'System Config' dropdown menu with the 'Restart' option highlighted. The table below lists two selected devices:

✓	Device Name	IP	Model	Version	MAC	
✓	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B1278.7.23.210627	6cf1:7e:5b:5:10	21023...
✓	210235C6FC...	192.168.1.78	DSM5002-HI-X	B2102.15.5.240531	c4:79:05:8f:89:14	210235C6FC1231000006 Login failed (inc...

3.5.2 Restore Defaults

Restoring defaults means restoring all the parameters of a device to factory defaults except network, user, and time parameters.

Select the target devices, click **System Config > Restore Defaults**, and then confirm.

The screenshot shows the 'System Config' dropdown menu with the 'Restore Defaults (Restore all factory default settings except network and user settings)' option highlighted. The table below lists two selected devices:

✓	Device Name	IP	Model	Version	MAC	
✓	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B1278.7.23.210627	6cf1:7e:5b:5:10	21023...
✓	210235C6FC...	192.168.1.78	DSM5002-HI-X	B2102.15.5.240531	c4:79:05:8f:89:14	210235C6FC1231000006 Login failed (inc...

3.5.3 Restore Factory Defaults

Restoring defaults means restoring all the parameters of a device to factory defaults.

Select the target devices, click **System Config > Restore Factory Defaults**, and then confirm.

The screenshot shows the 'System Config' dropdown menu with the 'Restore Factory Defaults (Restore all factory default settings)' option highlighted. The table below lists two selected devices:

✓	Device Name	IP	Model	Version	MAC	
✓	ECS-B300-I1...	192.168.1.58	ECS-B300-I1	NVR-B1278.7.23.210627	6cf1:7e:5b:5:10	21023...
✓	210235C6FC...	192.168.1.78	DSM5002-HI-X	B2102.15.5.240531	c4:79:05:8f:89:14	210235C6FC1231000006 Login failed (inc...

3.5.4 Device Maintenance

Device maintenance allows you to import device configurations, export diagnostic information and configurations.

1. Select devices, click **System Config > Maintenance**.

The screenshot shows the 'Maintenance (192.168.1.101)' window. It has two sections: 'Diagnosis Info' and 'Config Management'.

Diagnosis Info

Storage Path: [Text Field] [Browse] [Export]

Config Management

Import Settings: [Text Field] [Browse] [Import]

Export Settings: [Text Field] [Browse] [Export]

2. Perform the following operations as needed:

- Export diagnostic information, including log information and system configuration information. Click **Browse**, specify the destination, and then click **Export**. The diagnostic information will be saved as a .csv file to the specified location on your computer.
- Import configuration: Import a local configuration file into a device to replace the existing configuration file and change the device's configuration. Click **Browse**, locate the configuration file, and then click **Import**.
- Export configuration: Export the system configuration file of a device to a local folder for backup. Click **Browse**, specify the destination, and then click **Export**.

3.6 Export Device List

Export device information including device name, IP address, model, version information, MAC address, and serial number to a .csv file.

Select the devices from the list, click **Export**, choose the destination, and then click **Save** to export information of the selected devices.

Modify Network Parameters

Export

Selected: 2 device(s)

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status
☒	IPC-H244@P...	192.115.1.189	IPC-H244@PE...	GIPC-B6207.1.75.L01.22...	6cf17e7d:32:55	210235C5XS321A000046	Login succeeded
☒	NVR-S300-I1...	192.115.1.245	NVR-S300-I16...	NVR-B5213.2.15.241115	c4:79:05:98:34:b9	210235C8JD3246000001	Login succeeded

3.7 Other Operations

3.7.1 Select Multiple Devices

Select devices one by one or select multiple devices by click-and-drag. The total number of devices and the number of devices selected will be displayed on top of the device list.

3.7.2 Refresh Device List

Click **Refresh** to refresh the login status and device information of the added devices.

If no devices are selected, this operation will apply to all devices in the list. If you have selected device(s), this operation will only apply to those selected devices.

3.7.3 Filter Devices

Select device types or enter keywords to filter the device list by device name, IP, device model, version information, serial number, and operation status. To clear the keywords you have input, click ✕.

Device Type

IPC ✕ NVR ✕ Display C ✕

Keyword

300

Refresh

Search

+ Add

Edit

Delete

Change Password

System Config

Modify Network Parameters

Export

Selected: 0 device(s)

✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status
☐	NVR-S300-I1...	192.115.1.245	NVR-S300-I16...	NVR-B5213.2.15.241115	c4:79:05:98:34:b9	210235C8JD3246000001	Login succeeded

3.7.4 Sort Devices

Sort column contents in the device list in ascending or descending order by clicking a header: Device Name, IP, Device Model, Version Information, MAC, Serial Number, Operation, and Operation Status.

3.7.5 Clear Devices

In a custom project, you can click **Clear** in the upper-right corner to clear all devices under the project.

4 Device Configuration

4.1 Basic Operations

Click the corresponding icon in the **Operation** column to perform the following operations:

-  : [View Device Details](#)
-  : [Configure Cloud Service](#)
-  : [Access Device's Web Interface](#)

4.2 Basic Configuration



NOTE!

This function is only available to IPCs, NVRs, and ECs.

1. Device Name

Change device name.



NOTE!

The device name appears only when one device is selected.

1. Enter the new name.

Device Name

HIC5621@DH-FA

2. Click **Save**.

2. Time

Choose a way to change the device's time zone and system time.

- Change manually: Manually change the time zone and system time.
- Sync with computer time: Click **Sync with Computer Time** to sync the device's system time with the computer's system time.
- Enable **NTP**: Set the NTP server address (IP or domain name), port, and update interval, and the device's system time will automatically synchronize with the NTP server time.

Time Zone (UTC+08:00)Beijing, Hong Kong,Urumqi,Singapore, Taipei, Pt ▼

System Time 2026-6-22 09:32:42 Sync with Computer Time

NTP ☒ On ☐ Off

NTP Server Address 2001:db8:1234:5678::22

NTP Port 123

Update Interval 5m ▼

Save Close



NOTE!

For IPC devices, the NTP server address also supports IPv6.

3. Network

Modify a device's network configuration.



NOTE!

The network configuration appears only when one device is selected.

1. Configure the IP obtainment mode, network type, IP address, operating mode, subnet mask, and gateway. An NVR also allows the selection of a network interface. The specific configuration options are subject to the actual user interface.

IP Obtain Mode Static IP Address ▼ Port Type Copper Port ▼

IP Address 192 . 168 . 2 . 64 Operating Mode ▼

Subnet Mask 255 . 255 . 0 . 0

Gateway 192 . 168 . 2 . 1

2. Click **Save**.

4. DNS

Configure the domain name server.

1. Modify the preferred DNS server address and alternate DNS server address.

The preferred DNS address is used when the preferred DNS is functioning properly. When the preferred DNS server is unavailable, the alternate DNS server address is activated automatically to ensure uninterrupted network operation.

Preferred DNS Server	8 . 8 . 8 . 8
Alternate DNS Server	8 . 8 . 4 . 1

2. Click **Save**.

5. Port

Configure device port.

1. Change the HTTPS port and the HTTP port.

HTTPS Port	443
HTTP Port	80

2. Click **Save**.

6. SNMP

SNMP is used to monitor device status and locate device faults.

- Click **Enable** to enable SNMP.
- Choose an SNMP type: SNMPv2 or SNMPv3.

➤ (Recommended) SNMPv3

When the network security level is low, SNMPv3 is recommended due to its high level of security. SNMPv3 uses username and password authentication and DES encryption to provide a higher level of security.

SNMP	☒ On ☐ Off
SNMP Type	SNMPv3 ▼
Username	admin
Authentication Mode	MD5 ▼
Authentication Password	
Confirm Authentication Password	
Encryption Mode	DES ▼
Encryption Password	
Confirm Encryption Password	

Parameter	Description
SNMP Type	The default is SNMPv3.
Authentication Password	Used to verify packets sent from the device.
Confirm Authentication Password	Re-enter the authentication password.
Encryption Password	Used to encrypt data sent from the device.
Confirm Encryption Password	Re-enter the encryption password.

➤ SNMPv2

SNMPv2 is allowed when the network security level is high. SNMPv2 uses community string authentication and thus is less secure than SNMPv3.

SNMP ☒ On ☐ Off

SNMP Type

Read Community

Parameter	Description
SNMP Type	Choose SNMPv2. A message appears to remind you of security risks. Click OK to proceed.
Read Community	Set SNMP read-only community name to enable the management end to verify messages from the device. After successful authentication, SNMP messages with that community name can be received.

7. ONVIF

Configure IPC authentication mode.

Authentication Mode ☒ Standard ☐ Compatible

- Standard: Uses the ONVIF-recommended authentication mode.
- Compatible: Uses the device's current authentication mode.

8. Storage

Configure the storage card (SD card) for IPC.

Device Storage Details
[View Details](#)

Storage Card Configuration

Format Storage Card
[Format](#)

Video Storage Configuration

Storage Policy
Scheduled Recording & Alarm Recording


Storage Stream
Main Stream

ANR Configuration

ANR
☒ On
☐ Off

Stream Address
192.117.190.188

[Save](#)
[Close](#)

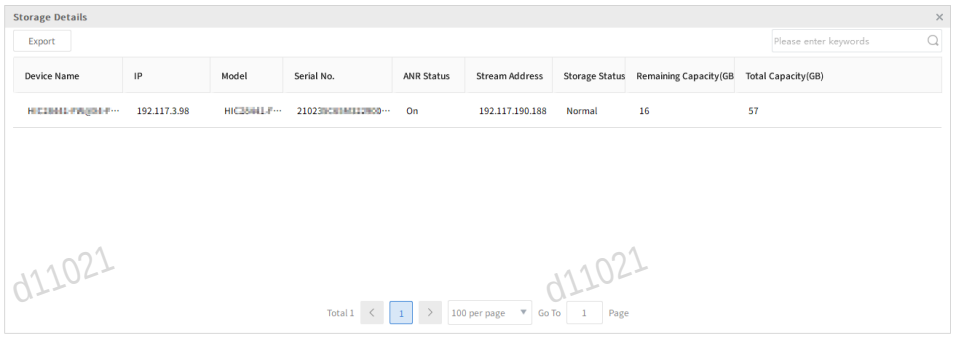Configuration	Description
Format Storage Card	Click Format and confirm the operation to format the storage card. The IPC will restart during the formatting process.
Device Storage Details	Click View Details to view the storage resource status, remaining capacity, and total capacity. 
Video Storage Configuration	- Storage Policy: Manual Recording & Alarm Recording, Scheduled Recording & Alarm Recordings, or Alarm Recording Only. - Storage Stream: Main Stream or Sub Stream. Click Save for the configuration to take effect.
ANR Configuration	After enabling ANR and setting the NVR stream receiving address, the IPC will temporarily store recordings/images on the SD card during network disconnection, and automatically upload them to the NVR after the network is restored.

9. User

Add users with different operation permissions for the IPC. After you complete the configuration, click **Save** to apply the configuration.

Username

Password

Weak Medium Strong

Confirm

User Type

☐ Select Permission

☐ Parameter Config ☒ Live View ☒ Playback ☒ Snapshot ☒ Two-way Audio

☒ PTZ Control ☐ Event Subscription ☒ Log ☐ Maintenance ☐ Upgrade

Configuration	Description
Username/Password	Enter a custom username and password for the IPC, and then confirm the password.
User Type	Choose Operator or Common User .
Select Permission	- Operator: Allowed permissions include parameter configuration, live view, playback, snapshot, two-way audio, PTZ control, event subscription, log, maintenance, and upgrade. - Common User: Allowed permissions include live view and playback.

4.3 Advanced Configuration

Advanced configuration includes images, encoding format, OSD, audio, motion detection, and intelligent server parameters of IPCs and NVR channels. The parameters displayed may vary depending on the device model.




NOTE!

The EC encoder channel only supports the configuration of image, encoding, and OSD parameters.

1. Image

Configure image parameters include display effects, image enhancement, scene, exposure, smart illumination, and white balance.

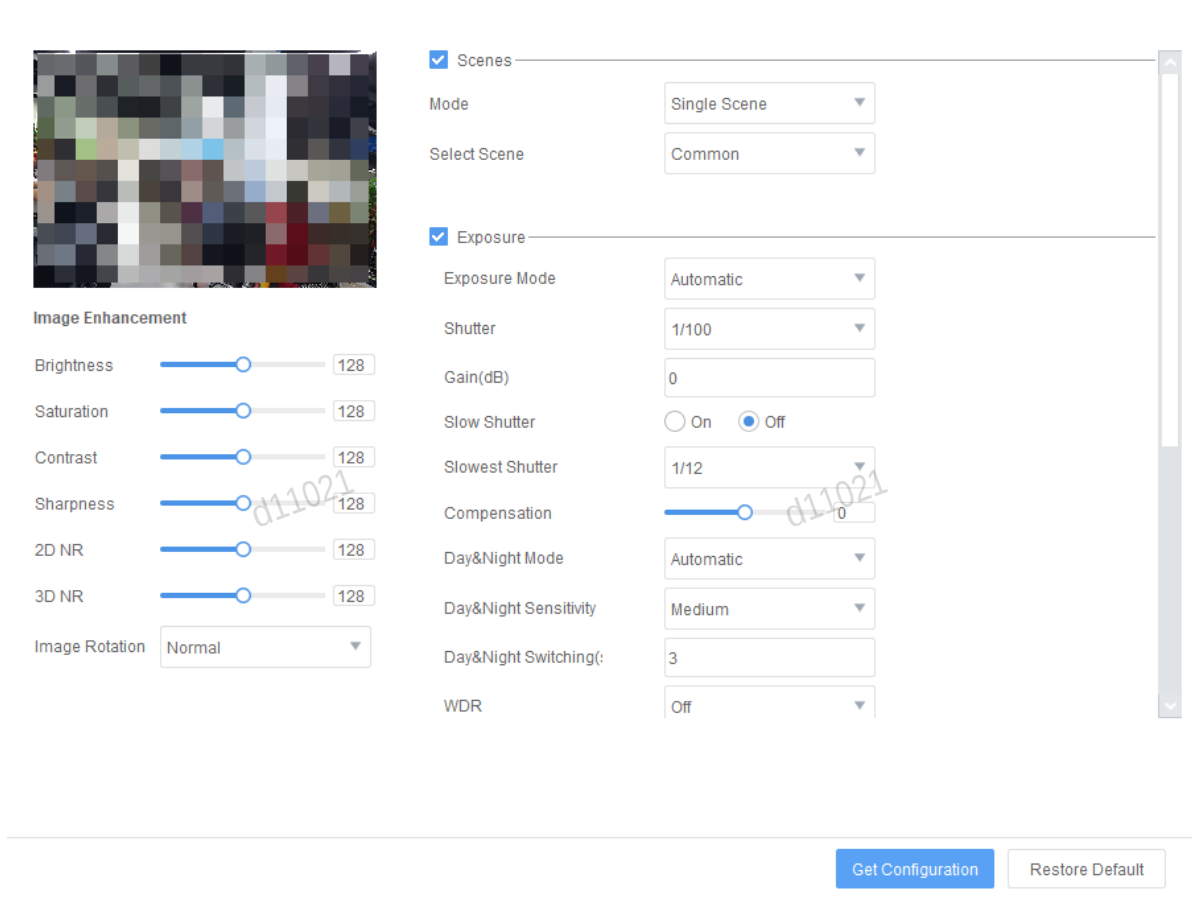

The screenshot displays a camera configuration window. On the left, there is a live video feed showing a pixelated image. Below it, the 'Image Enhancement' section includes sliders for Brightness, Saturation, Contrast, Sharpness, 2D NR, and 3D NR, all set to 128. The 'Image Rotation' dropdown is set to 'Normal'. On the right, the 'Scenes' section has a checked checkbox, a 'Mode' dropdown set to 'Single Scene', and a 'Select Scene' dropdown set to 'Common'. The 'Exposure' section also has a checked checkbox and includes settings for Exposure Mode (Automatic), Shutter (1/100), Gain (dB) (0), Slow Shutter (radio buttons for On/Off, with Off selected), Slowest Shutter (1/12), Compensation (0), Day&Night Mode (Automatic), Day&Night Sensitivity (Medium), Day&Night Switching (3), and WDR (Off). At the bottom right, there are two buttons: 'Get Configuration' and 'Restore Default'.

Operations:

- View display effects: You can view live video while adjusting image settings. The adjustments take effect immediately, allowing you to see the changes in real time. You can double-click the image to maximize it to full screen; double-click again to restore.
- Restore defaults: Click **Restore Default** to restore the default settings.
- Obtain configuration: Click **Get Configuration** to obtain the latest parameters from the device.
- To apply different scenes during different time periods, choose **Multiple Scenes** from the **Mode** drop-down list, set the scene type, schedule, illumination, and elevation for each scene, and then select **Enable Scene Schedule**. When the conditions set for the schedule, illumination, and elevation range are met at the same time, the selected scene will be applied. If the conditions are not met, the default scene will be used (with  displayed in the **Operation** column). Clicking  in the **Operation** column will set the current scene as the default scene.
- Copy to Channel: Copy image settings of a channel to other channels for quick configuration. Click **Copy To**, select parameters and channels, and then click **Save**.

Current Channel: Channel 002

Channels (192.168.2.101)

Parameters 2

☐ All
 ☒ Image Enhancement
 ☐ Exposure
 ☐ Smart Illumination
 ☐ White Balance

Channel 3

☐ All
 ☒ Channel 2
 ☐ Channel 3
 ☐ Channel 4
 ☐ Channel 5
 ☐ Channel 6
 ☐ Channel 7
 ☐ Channel 9
 ☐ Channel 10
 ☐ Channel 12
 ☐ Channel 13
 ☐ Channel 14
 ☐ Channel 15
 ☐ Channel 16
 ☐ Channel 17
 ☐ Channel 18
 ☐ Channel 19
 ☐ Channel 20
 ☐ Channel 23
 ☐ Channel 24
 ☐ Channel 26
 ☐ Channel 29
 ☐ Channel 30
 ☐ Channel 34
 ☐ Channel 35
 ☐ Channel 36
 ☐ Channel 37
 ☐ Channel 39
 ☐ Channel 40

4

1



NOTE!

The copy function only applies to channels that are connected via the private protocol.

2. Encoding

Configure encoding parameters, including capture mode, main/sub/third stream.

Current Channel

Channel 001

Capture Mode

2688×1520@60

Main

Compression

H.265

Resolution

1920×1080(1080P)

Frame Rate(fps)

60

Bit Rate(Kbps)

1536

[128 ~ 16384]

Bit Rate Type

VBR

Image Quality

Bit Rate

Quality

9

U-Code

Advanced Mode

Enable Third

Compression

H.265

Resolution

352×288(CIF)

Frame Rate(fps)

25

Copy To

Enable Sub

Compression

H.265

Resolution

720×576(D1)

Frame Rate(fps)

25

Bit Rate(Kbps)

512

[128 ~ 16384]

Bit Rate Type

CBR

Image Quality

Bit Rate

Quality

5

I Frame Interval

50

[5 ~ 250]

GOP

IP

Smoothing

Clear

Smooth

U-Code

Off

Save

Operations:

- To apply the changes, click **Save**.
- To copy configuration to a channel: Copy the encoding configuration of a channel to other channels. See Copy to Channel.

3. OSD



NOTE!

The MAC version does not support this function.

Configure OSD parameters. OSD refers to contents (such as text) overlaid on video images. OSD configuration includes display effects, channel name, content style, OSD content, and display area.

Current Channel Channel 001



Display Style

Effect Background

Font Size Medium

Font Color #ffffff

Min.Margin Double

Date Format dd/MM/yyyy

Time Format hh:mm:ss tt

Copy To

✓	No.	Position	Overlay OSD Content
☒	1	Area2	222
☒	2	Area3	222
☒	3	Area4	222
☒	4	Area5	222
☒	5	Area5	2222
☐	6	Area6	
☐	7	Area7	
☐	8	Area8	

Overlay Area2

X 50 Y 0

Aligning Left



NOTE!

For EC encoder channels, the Channel Name option is not available in the OSD content list.

Operations:

- View display effects: You can view live video while adjusting image settings. The adjustments take effect immediately, allowing you to see the changes in real time. You can double-click the image to maximize it to full screen; double-click again to restore.
- Add or delete OSD: Adjust the OSD style on the left, and enter the OSD content in the box on the right. The checkbox is automatically selected for the OSD content. To delete an OSD, clear the checkbox or clear the OSD content.
- Adjust OSD position: The position of each OSD is adjustable. Click a row on the right side, the coordinates of the OSD are displayed. Adjust the position as needed to avoid overlap.
- Use the copy function to copy the OSD configuration of a channel to other channels. See Copy to Channel.

4. Audio

Configure audio parameters, including audio input, audio input gain, encoding format, and sampling rate.



NOTE!

NVR channels do not support audio configuration.

Audio Input ☒ On ☐ Off

Audio Input Gain [0 ~ 255]

Encoding Format

Sampling Rate(KHz)

5. Motion Detection



NOTE!

The MAC version does not support this function.


Configure motion detection parameters. Motion detection is used to detect motion within the detection area during a specified time period. Motion detection configuration includes:

- Enable or disable motion detection
- Draw detection area
- Configure arming schedule
- Configure alarm linkage (alarm-triggered actions)

Current Channel

Motion Detection ☐ On ☒ Off

[Detection Area](#) [Arming Schedule](#) [Trigger Actions](#)

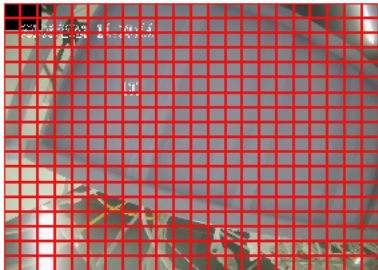


Sensitivity Low High

Draw Area

Clear All

Some parameters are described below.

Item	Description
Detection Area	You can specify detection areas by drawing on the image. The red grid indicates the detection area. Click Draw Area to start drawing, and click Finish Drawing when you have finished.
Sensitivity	The higher the sensitivity, the smaller the detectable pixels, and it is easier to trigger detection rules, but the false alarm rate will also increase accordingly. The specific value should be determined according to the actual scene or test.

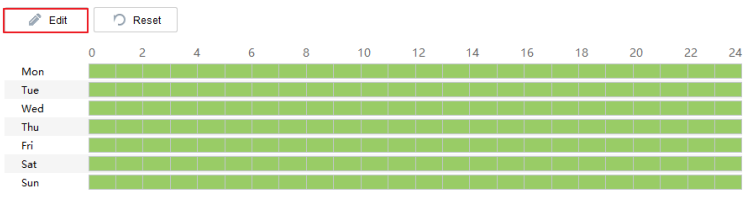Item	Description
Trigger Actions	Set actions to be triggered when a motion detection alarm occurs.
Arming schedule	Configure an arming schedule. The device generates alarms only during the arming schedule.  ● Click or drag on the green area to configure the arming schedule. ● Click Edit to input precise time periods manually. After finishing the configuration, you can click Copy to copy the arming schedule of the current day to other days.
Copy To	Copy the motion detection configuration of a channel to other channels. See Copy to Channel.

6. Intelligent Server

If a device is to be connected to the intelligent server for centralized management, you need to configure the server parameters for the device.



NOTE!

Only IPC supports intelligent server configuration.

The configuration may vary depending on the communication type. See the descriptions below for details.

Intelligent Server

Server IP

0 . 0 . 0 . 0

Server Port

5196

Platform Communication Type

UNV ▼

Camera No.

HIC2641-WH@Z80-VF-B

Device No.

EZIPC0

UNV (Persistent Connection) Parameter Description

Item	Description
Camera No.	Configure an identification number for the camera for device identification.
Device No.	Configure a VIID code for device identification on the server.

Intelligent Server

Server IP

Server Port

Platform Communication Type

Device ID

Username

Platform Access Code

Video&Image Database Settings

Coordinate Mode

Connection Mode

Report Data Type ☒ Motor Vehicle ☒ Non-Motor Vehicle ☒ Person ☒ Face

GA/T 1400 Parameter Description


Item	Description
Device ID	Enter a protocol-compliant number, where, digits 11-13 must be 119.
Username	Username that the device uses to access the upper-level platform.
Platform Access Code	Password that the device uses to access the upper-level platform.
Coordinate Mode	Indicate coordinates of the detection object. The percentage mode is recommended. ● (Recommended) Percentage mode: It specifies the range of 0-10000 for the x and y axes and uses it as a coordinate system to determine the detection object's position in the image. ● Pixel mode: It reports the coordinates of the horizontal and vertical pixels of the detection object in the image to determine the detection object's position in the image. ● Normalized mode: It specifies a range of 0-1 for x and y axes and uses it as a coordinate system to determine the detection object's position in the image.
Connection Mode	● Short Connection: Implemented by the standard HTTP protocol, and the connection mode used between devices and the upper-level platform is determined by the upper-level platform. ● Standard: Used only when the device is connected to a Uniview server.
Report Data Type	Select the types of data to be reported: motor vehicle, non-motor vehicle, person, and face.

4.4 Modify Device Names

Change device names in batches by importing a .csv file containing the modified device names. You need to export a file containing the current device names first.

1. Select the target devices, click **Modify Device Name**. A page as shown below appears.

2. Click **Export** to export a template file containing information of the selected devices, including IP, serial number, device type, and device name.

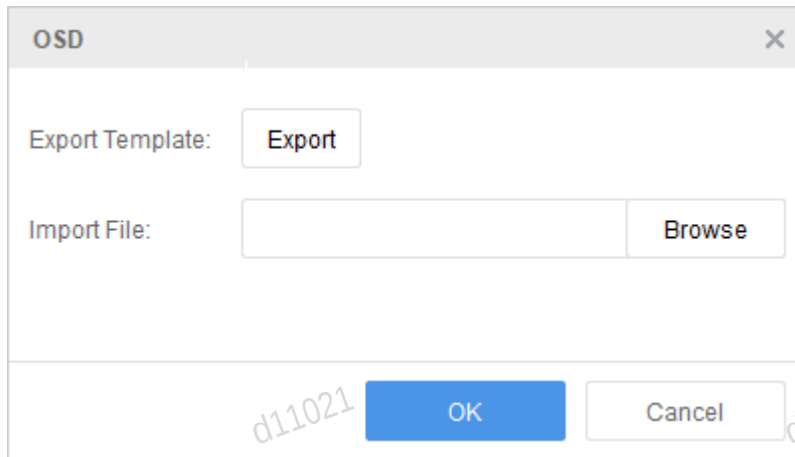

3. Modify the device names in the file, and then save the changes.
4. Click **Browse** to select the file.
5. Click **OK**. The current device names will be replaced by the device names contained in the imported .csv file.

4.5 Modify OSDs


Change device OSDs in batches by importing a .csv file containing the modified OSD configuration. You need to export the current OSD configuration first.



NOTE!

Only IPCs and EC encoders support changing OSDs in batches.

1. Select the target devices, click **Modify OSD**. A page as shown below appears.
2. Click **Export** to export a template file containing the current OSD configuration of the selected devices.

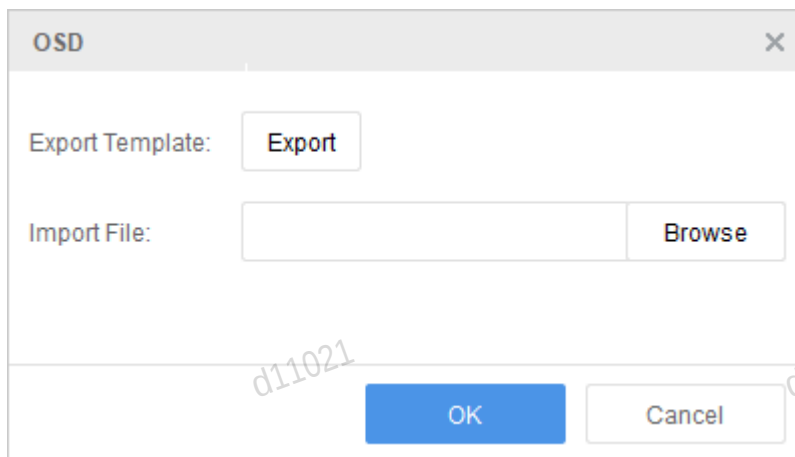

3. Modify the OSD configuration in the file, and then save the changes.
4. Click **Browse** to select the file.
5. Click **OK**. The current OSDs will be modified based on the OSD configuration contained in the imported file.

4.6 Building Configuration

Import a template to configure location linkage relationships for door stations, indoor stations, zone stations, and management stations in batches. After configuration, the device can conduct video intercom with devices it is linked with.

1. Ensure that door stations, indoor stations, zone stations, and management stations have been added to the system (EGS series management stations don't need to be added beforehand; their locations will be configured based on their relation with other devices).
2. Complete the information in the template.
 - (1) Click **Building Config > Download Template** to download the template locally.
 - (2) Fill in the device and location information in the template.

A	B	C	D	E	F	G	H	I	J	K	L
Serial No.	IP(+)	Subnet Mask(+)	Gateway(+)	Device Type(General In	Residential Compound(	Phase	Building	Unit	Room	Extension Station	Linked Door Station Button No.
172.20.138.11	255.255.255.0	172.20.138.1	Zone Station	Smart Community	0	0	0	0		1	
172.20.138.12	255.255.255.0	172.20.138.1	General Main Station	Smart Community	1	0	0	0		1	
172.20.138.13	255.255.255.0	172.20.138.1	General Main Station	Smart Community	1	0	0	0		2	
172.20.138.14	255.255.255.0	172.20.138.1	Door Station	Smart Community	1	1	1	0		1	
172.20.138.15	255.255.255.0	172.20.138.1	General Indoor Station	Smart Community	1	1	1	101		0	1
172.20.138.16	255.255.255.0	172.20.138.1	General Indoor Station	Smart Community	1	1	1	201		0	2
172.20.138.17	255.255.255.0	172.20.138.1	General Indoor Station	Smart Community	1	1	1	301		0	3



NOTE!

- Items marked with an asterisk (*) are required.
- Device serial number is optional.
 - If the serial number is provided, the device will be matched based on it. If the serial number in the template matches an added device but has different network information, the device's network information will be modified according to the template.
 - If the serial number is not provided, the device will be matched based on IP address.
- Device type must be one of the types listed in the template header.
- Location information and association relationships are as follows:
 - Zone station: Residential Compound is required, leave Phase/Building/Unit/Room blank or 0. Extension Station are optional. The linked devices include all indoor stations and management stations.
 - Management station: Residential Compound/Phase are required, Extension Station is optional, leave other fields blank or 0. After the location information is synced, all zone stations, other management stations, and the corresponding door stations and indoor stations within the management scope of this residential compound will be automatically linked.
 - Door station: Residential Compound/Phase/Building/Unit are required; Extension Station is optional; leave other fields blank or 0. After the location information is synced, all indoor stations within this unit and the management station responsible for managing this location will be automatically linked.
 - General Indoor station: Residential Compound/Phase/Building/Unit/Room are required; Extension Station is optional. After the location information is synced, the door station of this unit, the management station responsible for managing this location, and all zone stations of this residential compound will be automatically linked.

(Extension station indicates multiple device types at the same location. For example, when there are multiple management stations in the same residential compound and phase, the extension station number can be used to distinguish them.)
- If the door station has multiple buttons, please fill in the linked door station button number in the corresponding indoor station row. Each door station button can be linked to only one indoor station. Once linked, the door station can call the indoor station by pressing the linked button.
- In the template, it is necessary to fill in information for all the devices that are related. For example, if an outdoor station is related to three indoor stations, then you need to fill in information for both the outdoor station and the three indoor stations; otherwise, only the location information of the devices will be configured; their relations will not.

(3) Save the modified template.

3. Import the template.

- (1) Select devices in the list that you want to import location information for (must be devices listed in the template).
- (2) Click **Building Config > Import**. Upload the modified template from local. The import result is displayed.
- (3) When imported successfully, the operation status will be displayed as "Related devices configured successfully".

Basic Config									
Advanced Config									
Modify Device Name									
Modify OSD									
Building Config									
Display and Control Config									
Download Template									
Import									
✓	Device Name	IP	Model	Version	MAC	Serial No.	Operation Status		
☒	ET-B33H-M@R	192.168.0.238	ET-B33H-M	QPTS-B2581.5.8WorkM...	6c1f17e12818	210235C584121A000129	Related devices configured successfully.		
☒	EI-3715-H-ZD...	192.168.1.239	EI-3715-H-ZD	VIC-B3281.7.31130	c47909473f30	210235C7661219000015	Related devices configured successfully.		



NOTE!

To modify location information, update the template locally and re-upload it.

4.7 Server Config

Change the server configuration for IPC(s) by importing a .csv file containing the modified server configuration. You need to export the current server configuration first.

1. Select the IPC(s) for which you want to modify the server configuration, click **Server Config**, and then select **Management Server** or **Intelligent Server**.
2. Export the current device configuration information into a .csv file.
 - **Management Server:** Select the management protocol, and click **Export**.

The dialog box is titled "Management Server" with a close button (X) in the top right corner. It contains three main sections: "Protocol" with a dropdown menu showing "GB/T28181", "Export Config" with an "Export" button, and "Import File" with a text input field and a "Browse" button. At the bottom, there are two buttons: "OK" (blue) and "Cancel" (white).

- **Intelligent Server:** Select the platform communication type, and click **Export**.

The dialog box is titled "Intelligent Server" with a close button (X) in the top right corner. It contains three main sections: "Platform Communication" with a dropdown menu showing "UNV", "Export Config" with an "Export" button, and "Import File" with a text input field and a "Browse" button. At the bottom, there are two buttons: "OK" (blue) and "Cancel" (white).

3. After modifying the file locally, click **Browse** to select the modified file.
4. Click **OK**. After importing successfully, the server configuration of the device will be modified based on the server configuration contained in the imported file.

4.8 Display and Control Configuration

Set the function mode for display control device (distributed output node) as KVM node or splicing node. You can also set any of the output nodes as the management node (used to manage the whole display control system).

1. Select the device type as **Display Control Device** in the upper-left corner to filter all display control devices.
2. Click **Display and Control Config**.

3. Select device(s) and use the buttons above the list for batch configuration.

Display and Control Config							
☒ Enable Management ☒ Disable Management ☐ Splicing Mode ☐ KVM Mode ☐ Input Mode Refresh							
✓	Device Name	IP	Model	Management S	Mode	Network Port	Status
☐	ADU...	192.117.1.18	AD...	Enabled	-	1000M FULL	Login succeeded
☐	ADU...	192.117.1.71	A...	Enabled	-	1000M FULL	Login succeeded
☐	...	192.117.1.120	...	Enabled	Splicing Mode	1000M FULL	Login succeeded



NOTE!

The device will restart during mode configuration.

- **Enable Management:** Set the selected device(s) as the management node. Once configured, the Management Status for the device is **Enabled**, and you can log in to the display control management client via the device IP.
- **Disable Management:** Disable the management function for the selected device(s).
- **Splicing Mode:** Set the selected device(s) as the splicing mode. In this mode, the device connects with the screen and supports screen splicing management.
- **KVM Mode:** Set the selected device(s) as the KVM mode. In this mode, the device connects with the KVM display screen and supports KVM management control.
- **Input Mode:** Configure the device as input mode. In this mode, the device can connect to input signal sources, capture local signals, and supports HDMI video input and HDMI video output. (Only supported by some models)
- **Refresh:** Refresh the device status.

4.9 EZCfgTools

You can configure a template device (by opening the device's web interface to record configuration content as configuration items), and then batch-apply the parameters configured for the template device to multiple devices of the same model.



NOTE!

- Before using this function, ensure that the devices are online and successfully logged in.
- Only batch configuration of IPC devices of the same model is supported.


1. On the **Device Configuration** page, select devices of the same model, and click **EZCfgTools**. The system will automatically log in to the template device's web interface, and the floating window on the right will display the configuration content and configuration list.



NOTE!

- The template device defaults to the first device in the selected device list sorted by device list order.
- The system will automatically filter out devices of the same model that are online and add them to the configuration list.
- If there are no devices of the same model, the copy to other devices function will be unavailable.
- The current configuration takes effect on the template device by default.


2. Configure parameters on the template device's web interface, and the configuration content on the right will automatically record the configuration items.

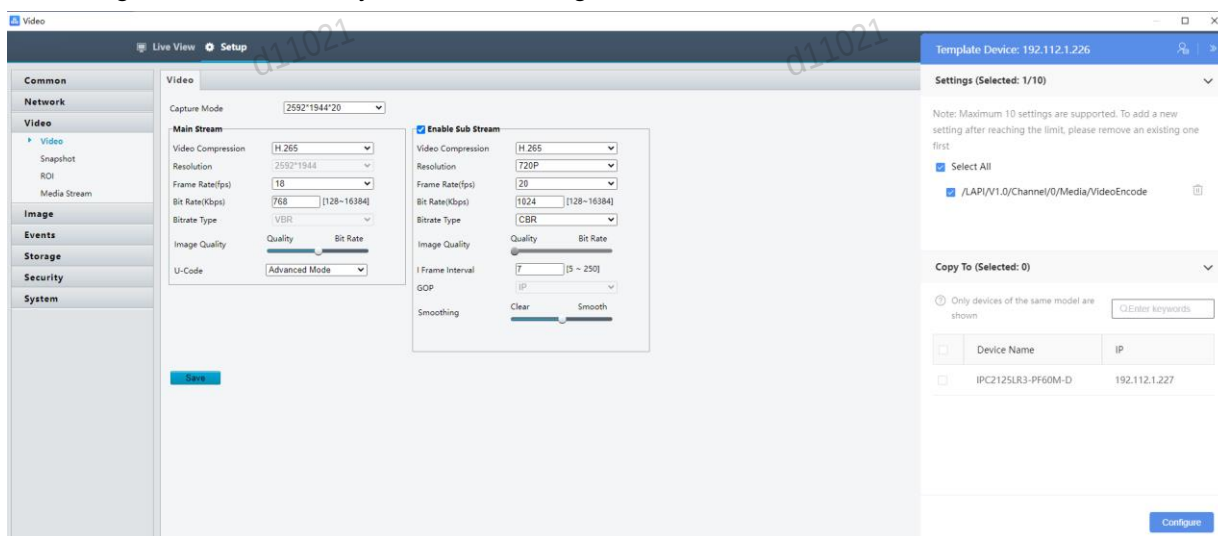

NOTE!

- Supports configuration of audio/video, image, intelligent, alarm, storage and other parameters of the device.
- Parameters that do not support batch configuration will be grayed out in the configuration list.
- A maximum of 10 configuration items are supported per session.

3. After the template device configuration is complete, select the devices below that you want to copy the configuration to, and click **Configure**. The system will automatically close the device's web page, return to the EZTools page, and display the configuration progress.

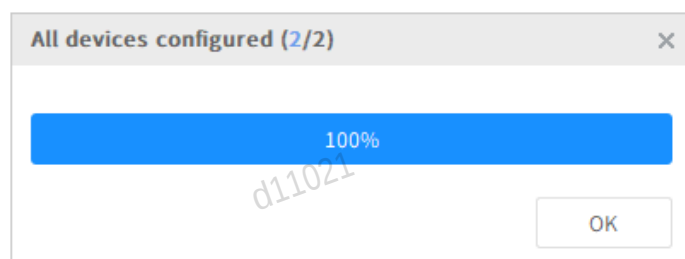

4. After the configuration is complete, click **OK** to display the configuration result pop-up window. You can export the configuration report and view configuration details.

Configuration Result				
Export Report Total configured: 2, successful: 2, failed: 0				
No.	Device Name	IP	/LAPI/V1.0/Channel/0/Media/VideoEncode	Configuration Result
1	IPC2125LR3-...	192.112.1.226	✓	✓
2	IPC2125LR3-...	192.112.1.227	✓	✓



NOTE!


- When a device has an abnormal status (e.g., SD card in an abnormal state), the system will skip the configuration of that item. The configuration result will display error information and device status details, and the exported report will also contain error messages and status information.
- EZCfgTools does not support password-related configuration (e.g., FTP password); otherwise, configuration will fail due to encryption-decryption mismatches or similar issues.

5 NVR Channel Management

Add or delete NVR channels.

5.1 Add NVR Channel

- Click the NVR Channel Management tab on the main page.
- Choose a way to add NVR channels:
 - Select and add: Select the target IPCs in the IPC list, select the target NVR in the NVR list, and then click **Import**. The selected IPCs will be added as channels to the specified NVR.

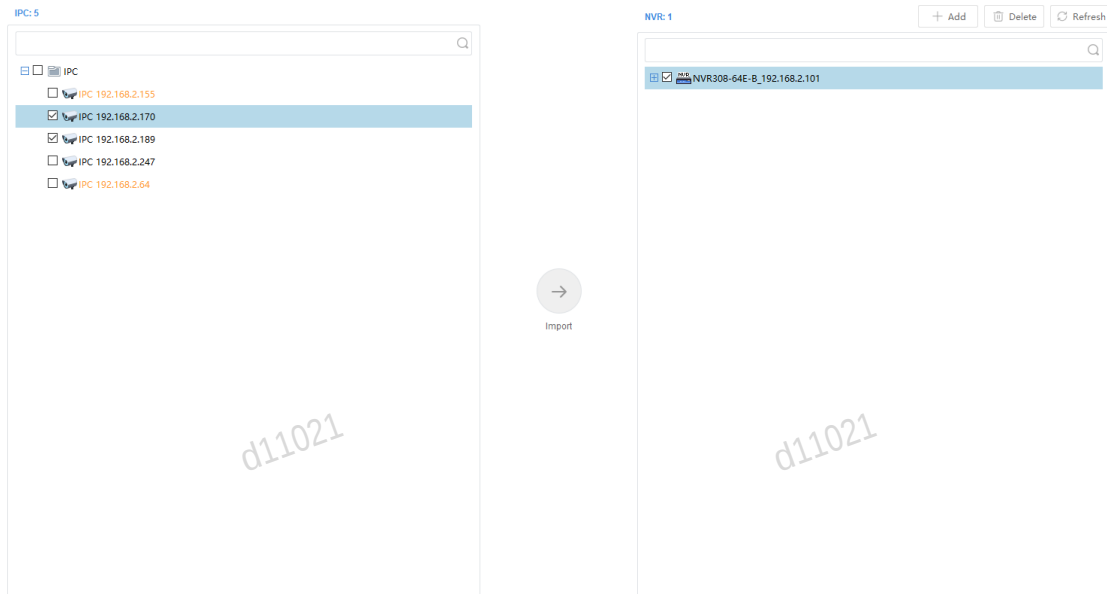

- Add manually: Select the target NVR, click **Add**. On the pop-up page, complete information for the IPC you want to add, and then click **OK**. The IPC will be added as a channel to the NVR.




NOTE!

- In the IPC list, orange indicates IPCs that have been added to the NVR.
- In the NVR list, blue indicates the newly added channels.

5.2 Delete NVR Channel

Delete NVR Channel

- Delete channels in batches: Select multiple channels under an NVR, and then click **Delete**. The selected channels will be deleted.

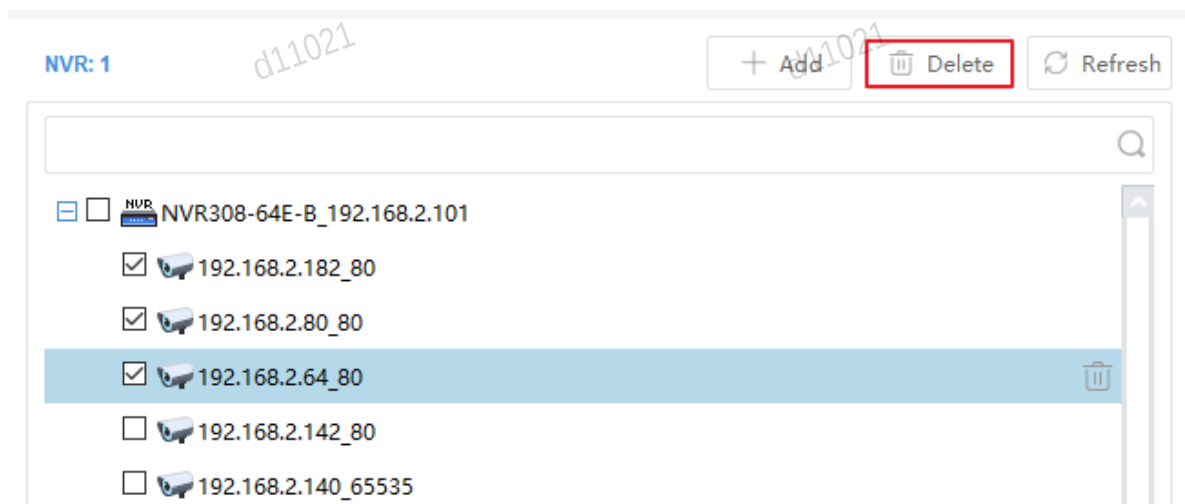

- Delete one channel: Hover over the channel you want to delete, and then click  to delete it.



6 Capacity Calculation

Calculate the allowed recording time or required hard disk space to facilitate capacity configuration.

6.1 Add Devices for Calculation

1. Click the **Calculation** tab.
2. Choose a way to add devices for calculation:
 - Click **Add**. On the page as shown below, configure the parameters as needed, and then click **OK**. The tool will calculate based on the settings you provided.

Add

Channel Number

1

Compression

H.264

Resolution

1920×1080(1080P)

Frame Rate

25

U-Code

Off

Environmental Complexity

Medium

Bit Rate(Kbps)

4096

Best Bit Rate(Kbps)

4096

OK

Cancel

- Click **Search**, and then select the devices for which you want to calculate. The tool will calculate based on the actual configuration of the selected devices.
3. Repeat the above steps to add all the devices you need.

+ Add Edit Delete Search to Add						
✓	Compression	Channels	Resolution	Frame Rate(fps)	Bit Rate(Kbps)	Total Bandwidth(Kbps)
✓	H.264	1	1920×1080(10...	25	4096	4096

6.2 Calculate Retention Time

Select the devices from the list, and then click the **Calculate Retention Time** tab on the right. Choose **Disk Mode** or **RAID Mode**. The tool will calculate retention time for the selected mode.

- Disk mode: Set the daily recording time and disk capacity. The number of days allowed for recording will be displayed below.

Calculate Days

Calculate Disks

Daily Recording Time:

24 Hour(s)

Space Needed: 42.2 GB

☒ Disk Mode


☐ RAID Mode

Disk Capacity:

2 TB ☒ TB ☐ GB

Usable Space: 1862.6 GB

Recording Time:

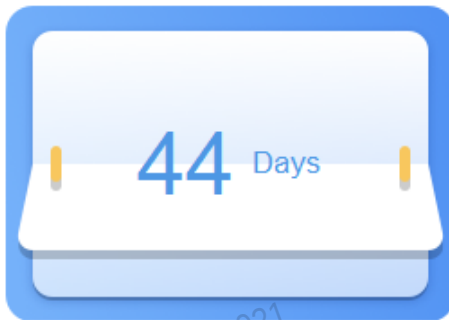

Note:

1. The displayed result is an estimated calculation and may differ from the actual performance. 
2. Actual space(GB) = Disk capacity(GB) * (1000^3) / 1024^3

- RAID mode: Set the daily recording time, RAID type (0/1/5/6), RAID disk capacity and quantity. The number of days allowed for recording will be displayed below.

Calculate Days

Calculate Disks

Daily Recording Time:

24

Hour(s)

Space Needed: 42.2 GB

☐ Disk Mode
 ☒ RAID Mode

Disk Capacity:

2

☒ TB
 ☐ GB

RAID Type:

RAID 0

RAID Disks:

1

Usable Space: 1862.6 GB

Recording Time:

Note:

- The displayed result is an estimated calculation and may differ from the actual performance. [?](#)
- Actual space(GB)=Disk capacity(GB)*(1000^3)/1024^3

6.3 Calculate Disks Needed

Select devices from the list, and then click the **Calculate Needed Disks** tab on the right. Choose **Disk Mode** or **RAID Mode**. The tool will calculate the required number of disks for the selected mode.

- Disk mode: Set the retention days, daily recording time, disk capacity. The required number of disks will be displayed below.

Calculate Days **Calculate Disks**

Retention Time:
 Day(s)

Daily Recording Time:
 24 Hour(s)

Space Needed: 42.2 GB

☒ **Disk Mode** ☐ RAID Mode

Disk Capacity:
 ☒ TB ☐ GB

Disks Needed: Usable Space: 1862.6 GB



1 Disks

Note:
1. The displayed result is an estimated calculation and may differ from the actual performance. [?](#)
2. $\text{Actual space(GB)} = \text{Disk capacity(GB)} \times (1000^3) / 1024^3$

- RAID mode: Set the daily recording time, retention days, RAID disk capacity, and RAID type. The required number of RAID disks will be displayed below.

Calculate Days **Calculate Disks**

Retention Time:
 Day(s)

Daily Recording Time:
 24 Hour(s)

Space Needed: 42.2 GB

☐ Disk Mode **☒ RAID Mode**

Disk Capacity:
 ☒ TB ☐ GB

RAID Type:

RAID Disks: Usable Space: 1862.6 GB



Note:
 1. The displayed result is an estimated calculation and may differ from the actual performance.
 2. Actual space(GB) = Disk capacity(GB) * (1000^3) / 1024^3

6.4 Other Operations

Edit or delete the devices that have been added for calculation.

Edit

1. Select the devices you want to edit, and then click Edit.

+ Add <input checked="" type="button" value="Edit"/> Delete Search to Add						
✓	Compression	Channels	Resolution	Frame Rate(fps)	Bit Rate(Kbps)	Total Bandwidth(Kbps)
☒	H.264	1	1920×1080(10...	25	4096	4096

2. Modify the parameters as needed.
3. Click **OK**.

Delete

Select the devices you want to delete, and then click **Delete**.


7 Upgrade Center

Upgrade versions for devices and channels.

7.1 Upgrade Configuration

Set the maximum number of devices that can be upgraded simultaneously and an upgrade period.

1. Click  in the top right corner. A page as shown below appears, select **Upgrade Config** tab.

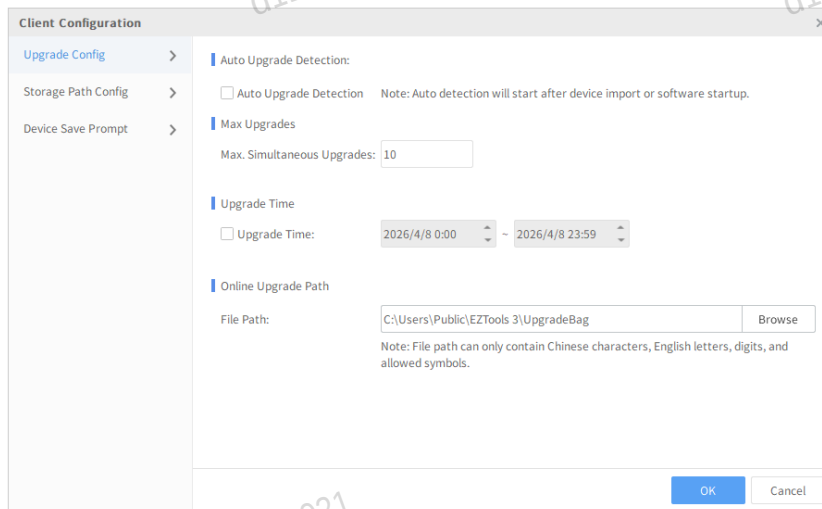

The screenshot shows the 'Client Configuration' dialog box with the 'Upgrade Config' tab selected. The left sidebar lists 'Upgrade Config', 'Storage Path Config', and 'Device Save Prompt'. The main area contains the following settings:

- Auto Upgrade Detection:** A checkbox labeled 'Auto Upgrade Detection' is unchecked. A note states: 'Note: Auto detection will start after device import or software startup.'
- Max Upgrades:** A section header followed by 'Max. Simultaneous Upgrades:' and a text input field containing the value '10'.
- Upgrade Time:** A section header followed by an unchecked checkbox 'Upgrade Time:'. To its right is a time range selector showing '2026/4/8 0:00' to '2026/4/8 23:59'.
- Online Upgrade Path:** A section header followed by 'File Path:' and a text input field containing 'C:\Users\Public\EZTools 3\UpgradeBag'. To the right of the field is a 'Browse' button. A note below states: 'Note: File path can only contain Chinese characters, English letters, digits, and allowed symbols.'

At the bottom right of the dialog are 'OK' and 'Cancel' buttons.

2. Configure the following parameters.
 - **Auto Upgrade Detection:** When selected, in a WAN environment, the system will automatically detect version upgrades for devices after device import or software startup.
 - **Max. Simultaneous Upgrades:** Enter the number of devices that can be upgraded simultaneously. The greater the number, the higher the network requirements. The default is 10.
 - **Upgrade Time:** When selected, the upgrade will begin during the specified time period; otherwise, the upgrade will start immediately. If an upgrade period is specified, make sure the tool is running during that period. Otherwise, the upgrade will fail.



NOTE!

Only 1 scheduled upgrade task can be saved at a time. If there are multiple upgrade tasks, the previous ones will be overwritten.

- **Online Upgrade Path:** Click **Browse**, and then specify the download destination for the upgrade packages.

3. Click **OK**.

7.2 Solution Upgrade

Upgrade the versions of devices within the solution based on the solution matching relationship. This function is only available for devices that have been added to the client.



NOTE!

- Upgrades are supported for IPCs and NVRs that have been added to the client.
- If UMS is added to the client, devices connected to UMS via the private protocol will be automatically synced to the client, allowing for upgrade. However, upgrading UMS is not supported.

7.2.1 Deployment Scenario (WAN)

During the initial deployment, you must first manually select the solution and version number. The system will then automatically retrieve the solution matching table, allowing you to upgrade your devices.

1. Select an upgrade mode.

- **Smart Upgrade:** Upgrades the device to the highest solution version if the current device version is lower than the **lowest solution version**.
- **Full Upgrade:** Upgrades the device to the highest solution version if the current device version is lower than the **highest solution version**.

2. Choose the solution and version number to retrieve the solution matching table, which includes the device model, lowest version, and highest version.



NOTE!

Only manageable device types are displayed in the matching table.

1
2

Select Mode & Solution
Device Upgrade

Select Mode & Solution Note: Please choose an upgrade mode and solution to upgrade your devices.

*Select Upgrade Mode: ☒ Smart Upgrade ☐ Full Upgrade ?

*Select Solution: Guard Solution *Select Solution Version: 1.0

Guard Solution Description

Solution Matching Table Note: Only manageable device types are displayed in this table.

Guard Solution 1.0 [View Version Details](#)

Model	Upgradeable Device Count	Lowest Solution Version	Highest Solution Version
HIC98442-IR	1	QIPC-B9102.3.1.231120	QIPC-B9102.3.3.241120
IPC-B2A5-IR	1	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
IPC-H244	2	GIPC-B6207.2.60.220406	GIPC-B6207.1.75.220406
IPC-S245-FW	1	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
IPC2128SB-ADF28KMC-I0	2	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
IPC675LFW-AXADUPKC-VG	1	GIPC-B6202.13.66.240111	GIPC-B6202.13.66.240111
IPC9312I-FW-AUKCF28-2F60-DT	1	CIPC-B2302.9.16.231205	CIPC-B2302.9.16.231205
NVR302-09E2-IQ	80	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305

Next

3. Click **Next**. The system will automatically detect upgradeable devices.

Select Mode & Solution
Device Upgrade

Total 2553 device(s)

Please enter keywords

✓	Device/Channel Name	IP/Channel	Model	Current Version	Target Version	Status
☐	192.168.1.112	192.168.1.10	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login failed (device restarting or incorrect ...)
☐	NVR302-09E2-IQ	192.168.1.11	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.100	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.101	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.102	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.103	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.104	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.105	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.115	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.116	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.128	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	192.168.1.112	192.168.1.133	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded
☐	NVR302-09E2-IQ	192.168.1.134	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login succeeded

Back
Download Upgrade
Download and Upgrade

4. Select device(s) and choose an option.

● Option 1 (Download and Upgrade): Direct upgrade

(1) Click **Download and Upgrade** and confirm the prompt to maintain network connection. The upgrade begins.

(2) On the **Upgrade Result** page, view the device's current version, target version, and upgrade status (waiting for upgrade, upgrade progress, failed, succeeded).

Check for Updates
Export Upgrade Report
Retry Download
Retry Upgrade
Total: 14; Upgrading: 0; Downloading: 0.

✓	Device/Channel Name	IP/Channel	Model	Current Version	Lowest Solution Version	Highest Solution Version	Target Version	Oper	Status
☐	[8MP] IPC21285B-ADF28KMC-10	192.168.1.10	IPC21285B-ADF28K...	GIPC-B6203.13.7.240429	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429	GIPC-B6203.13.7.240429		Waiting for upgrade
☐	HIC98442-IR@L-X40-Z28-X5-VH	192.168.1.10	HIC98442-IR	QIPC-B9102.1.68.230802	QIPC-B9102.3.1.231120	QIPC-B9102.3.3.241120	QIPC-B9102.3.3.241120		Upgrade failed The version server does not have matr...

(3) If the upgrade fails, you can click for the device or select device(s) and click **Retry Upgrade**.

● Option 2 (Download Upgrade): Download the upgrade package only, and upgrade the device manually later

(1) Click **Download Upgrade** and confirm the prompt to maintain network connection. The download begins.


(2) The download progress is displayed in the upper-right corner of the page.

(3) On the **Download Result** page, view the device's current version, target version, and download status (waiting for download, failed, completed).

Check for Updates
Export Upgrade Report
Retry Download
Retry Upgrade
Total: 14; Upgrading: 0; Downloading: 0.

✓	Device/Channel Name	IP/Channel	Model	Current Version	Lowest Solution Version	Highest Solution Version	Target Version	Oper	Status
☐	192.168.1.112	192.168.1.33	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Download failed The version server does not have matr...
☒	IPC-S245-FW@PAEK-IR8-Z-CA-VF	192.168.1.42	IPC-S245-FW	GIPC-B6203.13.7.240429	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429	GIPC-B6203.13.7.240429		Download completed

- Once the download completes, you can click **Upgrade** to start the upgrade immediately, or click **Close** to exit and upgrade later. To upgrade later, follow the steps in **Option 1** (the upgrade package won't be downloaded again).

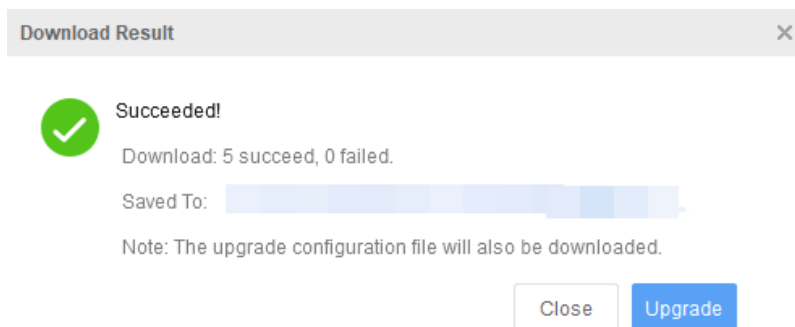


- For devices that failed to download, you can view the failure cause. To retry the download, click  for the device or select device(s) and click **Retry Download**.

7.2.2 Deployment Scenario (LAN)

For devices on a LAN, you can switch your computer's network to a WAN to download the upgrade package first, and then perform the upgrade within the LAN.

Steps:

1. Connect your computer to the LAN and add the device to the client.
2. Connect your computer to the WAN. Follow **Step 4** in [Deployment Scenario \(WAN\)](#), and click **Download Upgrade**. Once the download completes, do not proceed further or close the pop-up window.

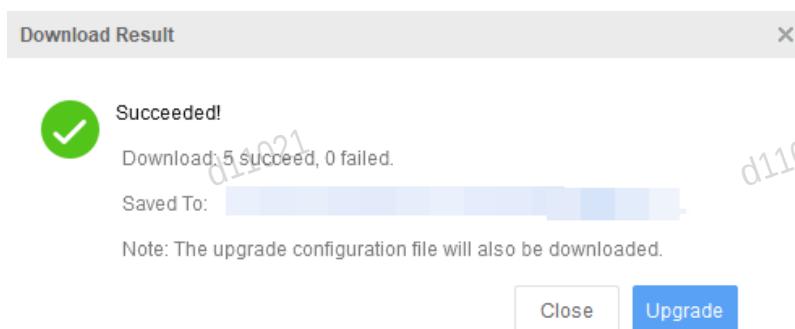

3. Reconnect to the LAN and click **Upgrade** in the **Download Result** window.



NOTE!

If you accidentally closed the pop-up window in Step 2, you can click **Check for Updates** above the download result list, select device(s), and then click **Download an Upgrade** (the upgrade package won't be downloaded again).

7.2.3 Non-Deployment Scenario (WAN)

In non-deployment scenarios where solution configuration information is saved locally, you can view the matching table used in the last version upgrade, get the latest solution version, and then upgrade your devices.

1. Go to **Solution Upgrade**.
2. (Optional) Click **Change Solution** to modify the upgrade mode, solution name, and version number. After modification, you can save and back (proceed to Step 3) or check for updates directly (proceed to Step 5).

- Click **Get Latest Version** next to the solution name to get and update to the latest released version of the solution.



NOTE!

If you prefer not to use the latest solution version, you can directly click **Check for Updates** above the device list to check the current device version (skip to Step 5).

Select Mode & Solution: Smart Upgrade **Guard Solution (1.0) Get Latest Version** Change Solution

Guard Solution Description

Note: UMS devices cannot be upgraded. ⓘ

Status: All Keyword: Please enter keywords

Total 6; Upgrading: 0; Downloading: 0.

✓	Device/Channel Name	IP/Channel	Model	Current Version	Lowest Solution Version	Highest Solution Version	Target Version	Operi	Status
☐	NVR302-09E2-IQ	192.168.1.11	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Download completed
☐	NVR302-09E2-IQ	192.168.1.100	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Upgrade succeeded
☐	192.168.1.112	192.168.1.133	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Upgrade succeeded
☐	192.168.1.112	192.168.1.25	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Upgrade succeeded
☐	192.168.1.112	192.168.1.36	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Upgrade succeeded
☐	192.168.1.112	192.168.1.37	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305		Upgrade succeeded

- After retrieving the latest solution version, select device(s), and click **Check for Updates** to check the device version.

Solution Upgrade

Guard Solution 1.0

✓	Model	Upgradeable Device Count	Lowest Solution Version	Highest Solution Version
☒	HIC98442-IR	1	QIPC-B9102.3.1.231120	QIPC-B9102.3.3.241120
☒	IPC-B2A5-IR	1	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
☒	IPC-H244	2	GIPC-B6207.2.60.220406	GIPC-B6207.1.75.220406
☒	IPC-S245-FW	1	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
☒	IPC2128SB-ADF28...	2	GIPC-B6203.13.8.231008	GIPC-B6203.13.7.240429
☒	IPC675LFW-AX4D...	1	GIPC-B6202.13.66.240111	GIPC-B6202.13.66.240111
☒	IPC9312I-FW-AUK...	1	CIPC-B2302.9.16.231205	CIPC-B2302.9.16.231205
☒	NVR302-09F2-IQ	80	NVR-B3113.38.44.240305	NVR-B3113.38.44.240305

- The system will automatically detect upgradeable devices. On the **Check for Updates** window, select device(s) you want to upgrade.

Check for Updates						
Total 8 device(s)		Please enter keywords				
✓	Device/Channel Name	IP/Channel	Model	Current Version	Target Version	Status
☒	HIC98442-IR@L-X40-Z28-X5-VH	192.168.1.30	HIC98442-IR	QIPC-B9102.1.68.230802	QIPC-B9102.3.3.241120	Login failed (devic...
☒	IPC-B2A5-IR@PAEK-IR8-F80-VF	192.168.1.154	IPC-B2A5-IR	GIPC-B6203.13.7.240429	GIPC-B6203.13.7.240429	Login failed (devic...
☒	IPC-H244@PEK-F60-PW-VG	192.168.1.2.80	IPC-H244	GIPC-B6207.1.75.220406	GIPC-B6207.1.75.220406	Login failed (devic...
☒	IPC-S245-FW@PAEK-IR8-Z-CA-VF	192.168.1.1.42	IPC-S245-FW	GIPC-B6203.13.7.240429	GIPC-B6203.13.7.240429	--
☒	【8MP】IPC2128SB-ADF28KMC-I0	192.168.1.2.50	IPC2128SB-ADF28KMC-I0	GIPC-B6203.13.7.240429	GIPC-B6203.13.7.240429	Login failed (devic...
☒	IPC675LFW-AX4DUPKC-VG	192.168.1.30.5	IPC675LFW-AX4DUPK...	GIPC-B6202.13.2.231008	GIPC-B6202.13.66.240111	Login failed (devic...
☒	IPC9312I-FW-AUKCF28-2F60-DT	192.168.1.2.28	IPC9312I-FW-AUKCF28...	CIPC-B2302.10.7.240426	CIPC-B2302.9.16.231205	Login failed (devic...
☒	192.168.10.112	192.168.1.44.5	NVR302-09E2-IQ	NVR-B3113.37.20.230625	NVR-B3113.38.44.240305	Login failed (devic...
				Download Upgrade	Download and Upgrade	

- Click **Download and Upgrade** to begin the upgrade immediately.
- Click **Download Upgrade** to download the upgrade package first, and upgrade the device manually later.

7.2.4 Non-Deployment Scenario (LAN)

For devices on a LAN, you can switch your computer's network to a WAN to download the upgrade package first, and then perform the upgrade within the LAN.

1. Connect your computer to the WAN. Follow **Step 5** in [Non-Deployment Scenario \(WAN\)](#), and click **Download Upgrade**. Once the download completes, do not proceed further or close the pop-up window.

Download Result

 Succeeded!

Download: 5 succeed, 0 failed.

Saved To: 

Note: The upgrade configuration file will also be downloaded.

Close

Upgrade

2. Reconnect to the LAN and click **Upgrade** in the **Download Result** window.



NOTE!

If you accidentally closed the pop-up window in Step 1, you can click **Check for Updates** above the download result list, select device(s), and then click **Download and Upgrade** (the upgrade package won't be downloaded again).

7.2.5 Export Upgrade Report

On the **Upgrade Result** page, you can click **Export Upgrade Report** to export upgrade details in a table.

7.3 Custom Upgrade

Upgrade the version of devices or channels by choosing an upgrade mode below:

- **Template upgrade:** Uses a template that specifies paths to upgrade packages on your computer and uses them to upgrade different types of devices.
- **Online upgrade:** Obtains upgrade packages from the cloud to upgrade various types of devices.
- **File upgrade:** Uploads upgrade files to upgrade devices of the same type.

Check for Updates Device Upgrade Channel Upgrade Export Upgrade Report Total: 17, Upgrading: 0, Downloading: 0							
Please enter keywords							
✓	Device/Channel Name	IP/Channel	Model	Serial No.	Current Version	Target Version	Status
☐	IPC-E248-FW@PAEK-2-WP	192.163.1.89	IPC-E248-FW@PAEK-2-WP	210235C8Q41229000114	QIPC-B2202.10.7.240426		--
☐	210235C8Q41229000006	192.163.1.78	DSMIR002-FH-X	210235C8Q41229000006	B2102.13.5.240531		--
☐	ECS-B100-FH@S-XP-HD	192.163.1.58	ECS-B100-FH@S-XP-HD	210235C8Q41229000010	NVR-B1278.7.23.230627		--

7.3.1 Upgrade Device

1. Template Upgrade

This mode uses a template file containing paths to the upgrade packages on your computer and uses these upgrade packages to upgrade devices of various types in batches.

Scenario 1: A local upgrade package is available

1. Select the devices you want to upgrade, and then click **Device Upgrade**.
2. Choose **Template File**.

Upgrade

Upgrade Mode:

☒ Template File ☐ Online Upgrade ☐ File Upgrade

Check and Download:

Check and Download

Export Template:

Export

File Path:

Browse

Note: 1.This mode uses a template that specifies paths to upgrade packages on your computer and uses them to upgrade different types of devices. 2.File path can only contain Chinese characters, English letters, digits, and allowed symbols.

Upgrade Config

Max Upgrades:

10

Upgrade

Cancel

3. Click **Export** to export a template containing the basic information about the selected device. In the template file, enter paths to the upgrade packages on your computer.
4. Click **Browse** to locate the configured template file, and then click **Open** to import the template.

5. (Optional) Click . See [Upgrade Config](#).
6. Click **Upgrade**. The devices will be upgraded during the configured upgrade time.

Scenario 2: LAN device, no local upgrade package, a computer can switch networks

1. Connect your computer to the WAN. Select the devices you want to upgrade, click **Device Upgrade**, choose **Template File**, and then click **Check and Download** to download the upgrade package and template.
2. Connect your computer to the LAN. Import the upgrade template from the downloaded folder.


Scenario 3: LAN device, no local upgrade package, a WAN computer, a LAN computer

1. On the LAN computer, select the devices you want to upgrade, click **Device Upgrade**, choose **Template File**, and then click **Export** to export the device information template.
2. On the WAN computer, go to **Device Management** > **Add** to import the device information template to add devices. Then, go to the **Template File** page, click **Check and Download** to download the upgrade package and upgrade template.
3. Copy the downloaded folder to the LAN computer.
4. On the LAN computer, go to the **Template File** page to import the upgrade template.

2. Online Upgrade

This mode checks for updates for the connected devices and downloads upgrade packages (if updates are available) to your computer to upgrade devices of various types.

1. Select the devices you want to upgrade, and then click **Check for Updates**. The tool checks for updates for the selected devices. If updates are available, **Upgradable** will be displayed in the **Operation Status** column.
2. Select the upgradable devices, and click **Device Upgrade**.

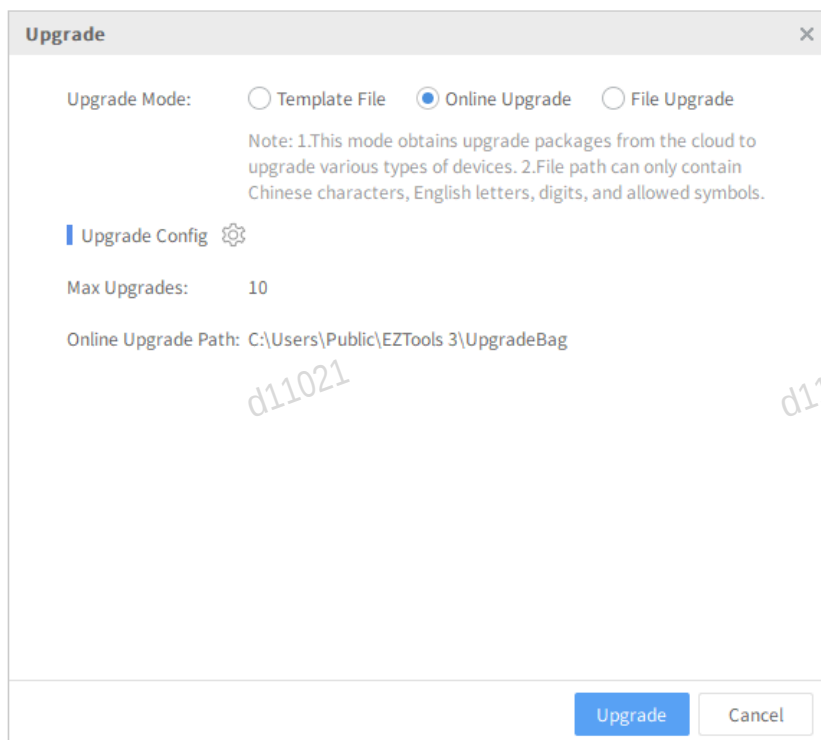

The screenshot shows a dialog box titled "Upgrade" with a close button (X) in the top right corner. Inside the dialog, there are three radio buttons for "Upgrade Mode": "Template File", "Online Upgrade" (which is selected), and "File Upgrade". Below these is a note: "Note: 1.This mode obtains upgrade packages from the cloud to upgrade various types of devices. 2.File path can only contain Chinese characters, English letters, digits, and allowed symbols." There is a section for "Upgrade Config" with a gear icon. Below that, it shows "Max Upgrades: 10" and "Online Upgrade Path: C:\Users\Public\EZTools 3\UpgradeBag". At the bottom right, there are two buttons: "Upgrade" and "Cancel".

3. Choose **Online Upgrade**.

4. (Optional) Click . See [Upgrade Config](#).


5. Click **Upgrade**. The devices will be upgraded during the configured upgrade time.

3. File Upgrade

This mode allows upgrading devices of the same type by uploading upgrade files.

1. Select the devices you want to upgrade, and then click **Device Upgrade**.

2. Choose **File Upgrade**.

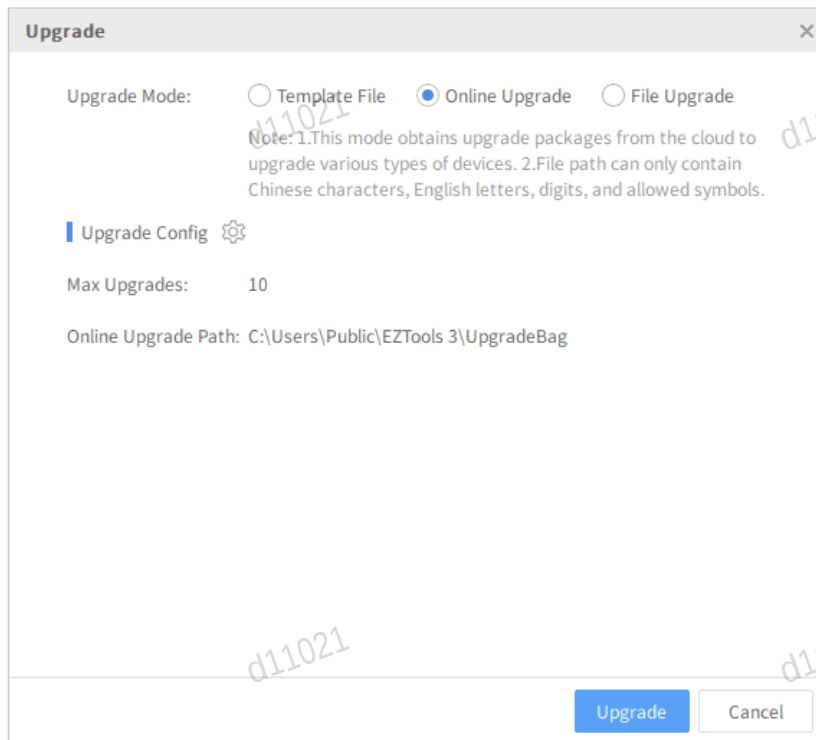

3. Click **Browse**, and then locate the upgrade packages on your computer.

4. (Optional) Click . See [Upgrade Config](#).

5. Click **Upgrade**. The devices will be upgraded during the configured upgrade time.

7.3.2 Upgrade Channel

Upgrade camera connected to an NVR (also known as NVR channels).

1. Select the NVR, click **Channel Upgrade**.

2. Select the channels you want to upgrade, and then click **OK**.

3. The remaining operations for upgrading a channel are the same as upgrading a device. See Upgrade Device for details.

7.3.3 Cancel Upgrade

If an upgrade task is scheduled, the upgrade time will be displayed at the top, and you can click **Cancel** behind it to cancel the task.



NOTE!

Only the pending upgrade tasks will be cancelled. If the upgrade task has already started, the ongoing tasks will remain unaffected.

7.3.4 Export Upgrade Report

1. Select the desired devices, and then click **Export Upgrade Report**. The **Export Report** page as shown below appears
2. View the total number of devices, the number of devices to be upgraded, and the number of successful or failed devices in the upgrade. To export the report, click **Export**.

Export Report

Export

- Total device(s): 2
- Device(s) to upgrade: 2
- Succeeded: 0
- Failed: 2

8 Client Configuration

Click  in the top right corner, go to **Client Configuration** page.

Item	Description
Upgrade Config	See Upgrade Config .
Storage Path Config	During the tool's operation, some files recording exceptions will be generated. Click Browse to select the storage path for these files, and click OK to save. Exception File Storage Path File Path: Browse
Device Save Prompt	Set whether to display a reminder to save devices from the default project before exiting the client. Note: Each time you enter the client, the system clears the devices in the default project and searches for new devices. If you have not saved the devices from the default project to a custom project, the existing devices in the default project will be lost.

	Don't Show Again ☒ Ask Every Time 1.When enabled, you'll be asked whether to save the device(s) in the default project each time before exiting. 2.When disabled, you won't be asked, and the device(s) in the default project won't be saved when exiting.
--	---

9 Application Center



NOTE!

The MAC version does not support this function.

The application center provides a portal through which users can conveniently download, install, and upgrade other applications of our company.