


EZStation Video Management Software

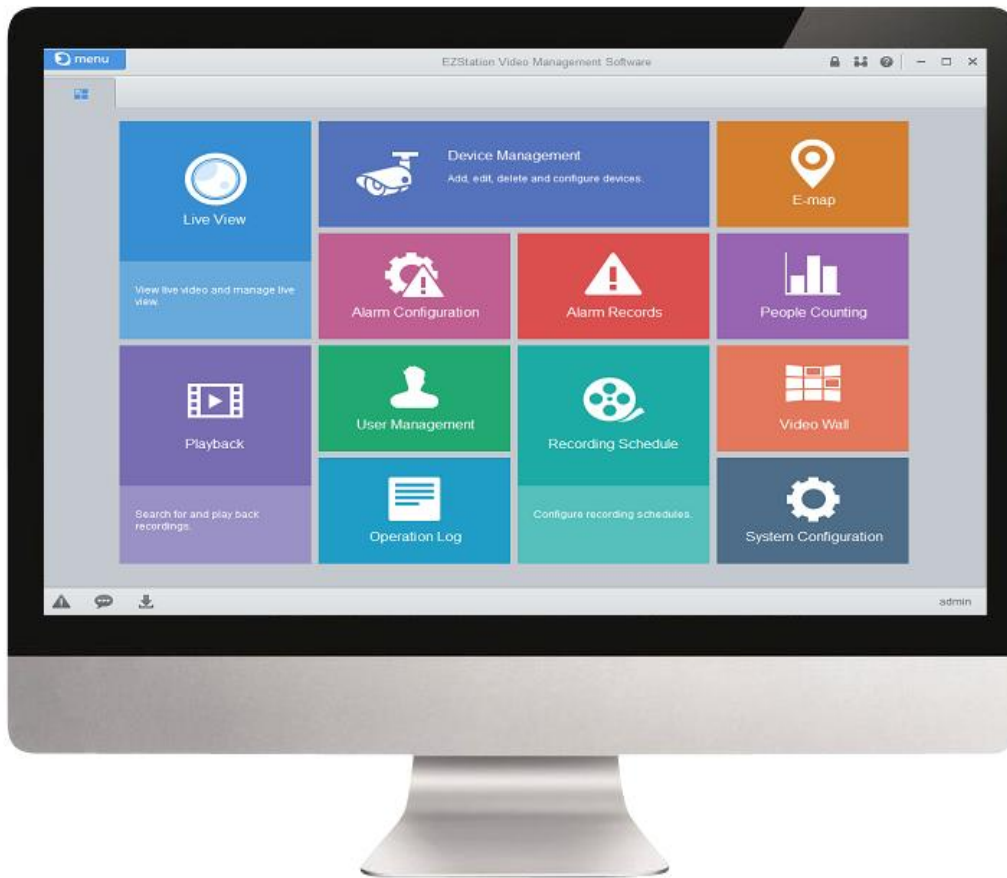

Key Features

- Unified management for IP cameras, NVRs, decoding devices, and etc.
- Up to 256 local channels and 128 cloud channels; add, edit and share cloud devices.
- Automatic device discovery (or search by network segment); add devices by domain name/IP address; add devices and adjust time in batch.
- Diverse capabilities:
 - Live view: up to 64 live view, scene, custom view, split screen, multi-window display, corridor mode, sequence display, audio, two-way audio
 - Recording: local recording, recording schedule, alarm-triggered recording, recording download
 - Playback: recording search by time/event, local/remote playback, synchronous playback, smart search, and play recordings on SD card
 - PTZ control: Pan, tilt, zoom, 3D positioning, preset, patrol, pattern, and patrol plan
 - Alarm: temperature, device online/offline, motion detection, and VCA alarming and alarm triggered live view and recording

- People counting: entered/left/entered and left statistics, daily/weekly/monthly/yearly report export.
- E-Map: hot spot for easy live view, hot zone for sub-map, eagle eye, and map alarming
- Video wall: decoding channel configuration, sequence display and playback on video wall
- Flexible maintenance such as log export, alarm info export
- Friendly user interface for easy operation

Specifications

Function	Description
Note: Functions and system requirements may vary with software version.	
Device Management	
Devices Supported	Max. 256 local channels and 128 cloud channels
	Max. 64 local devices and 64 cloud devices
Features	Auto device discovery, and adding, configuring, time adjusting in batch
Live Monitoring	
Screen Layout	1/ 4/ 5 /6 /8 /9 /10 /13 /16 /17 /25 /32 /36 /64 split screen(s) with up to 3 sub screens Note: Max. 64 screens live view
PTZ Control	Pan, Tilt, Zoom, Preset, Patrol, 3D positioning, IR control, wiper control, heat control, snow removing Note: Actual functionality may vary depending on device capability.
Features	Sequence display, snapshot, local record, audio, two-way talk, and instant playback
Playback	
Video Source	Recording video from NVR
Max Channels	16 (Async)/16 (Sync)
Search Type	Time/event/calendar
Export File	.ts, .mp4
Features	Recording schedule and download, snapshot, -16x~16x speed for forward and backward, audio, digital zoom
Alarm	
Type	Multiple alarm types including device alarms and VCA alarms
Alarm Triggering	Live view, recording, email, preset, alarm output and etc.
Features	Alarm schedule, actions setup, alarm memo, alarm info popup
E-Map	
Format	PNG/JPEG/BMP
Map Alarm	Alarm flash, search and acknowledge
Features	Hot spot, hot zone, map zoom in/out, eagle eye
System Requirement	
EZStation 64-bit	Operating System: Microsoft Windows 7/Windows 8/Windows10 (64-bit) CPU: Intel Core i5 3.1 GHz or higher Memory: 4GB or higher
EZStation 32-bit	Operating System: Microsoft Windows 7/Windows 8/Windows10 (32-bit or 64-bit) CPU: Intel Pentium IV 3.0 GHZ or higher (4 Core, 3.0GHZ recommended) Memory: 2GB or higher Note: The 64-bit Windows shall be able to host 32-bit software.

EZStation Mac	<p>Operating System: Mac OS 10.11 or higher</p> <p>CPU: Intel Core i5 3.1 GHz or higher</p> <p>Memory: 4GB or higher</p>
---------------	--

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R. China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.