

uniview

# NVR202EP Series Network Video Recorder



## Features :


- 8/16-channel 1080P input
- ONVIF compliant
- HDMI and VGA output up to 1080P
- Accurate retrieval, instant playback
- 2 SATA HDDs up to 12 TB
- 8 RJ45 POE+ interfaces
- Support P2P, UPnP, NTP, DHCP, PPPoE
- Support mobile client access

# NVR202EP Series

## Network Video Recorder

Video	NVR202-08EP	NVR202-16EP
IP Video Input	8-ch	16-ch
VGA Output	1-ch	
HDMI Output	1-ch	
Sync Playback	8-ch	16-ch
Audio		
Output	1-ch, RCA	
Two-way Audio	1-ch input, 1-ch output (reuse the audio output channel), RCA	
Hard Disk Driver		
HDD	2 SATA interface	
Capacity	Up to 6TB capacity for each HDD	
External Interface		
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet interface	
PoE Interface	8 RJ45 10M/100M PoE+ interface (802.3at)	
USB Interface	1 USB2.0 interface, 1 USB3.0 interface	
Network		
Incoming Bandwidth	64Mbps	128Mbps
Outgoing Bandwidth	96Mbps	
Decoding		
Live View/Playback	8MP@25, 6MP@25, 4MP@30, 3MP@30, 1080P@30, 720P@30	
Capability	32-ch@D1, 16-ch@720P, 6-ch@1080P	
General		
Power	52V DC, 1.8A	
Consumption	≤ 93.6W (fully loaded)	
PoE	Max. 30W for single port Max. 72W in total	
Working Environment	-10°C to 55°C (10 °F to 131 °F) 10% to 90% RH	
Weight	Empty<1.5kg(3.3lb) Fully loaded<3kg(6.6lb)	
Dimensions (W x D x H)	360.0 × 254.3 × 43.6 mm (14.17" × 10.01" × 1.72")	

\*Product specifications and availability are subject to change without notice.

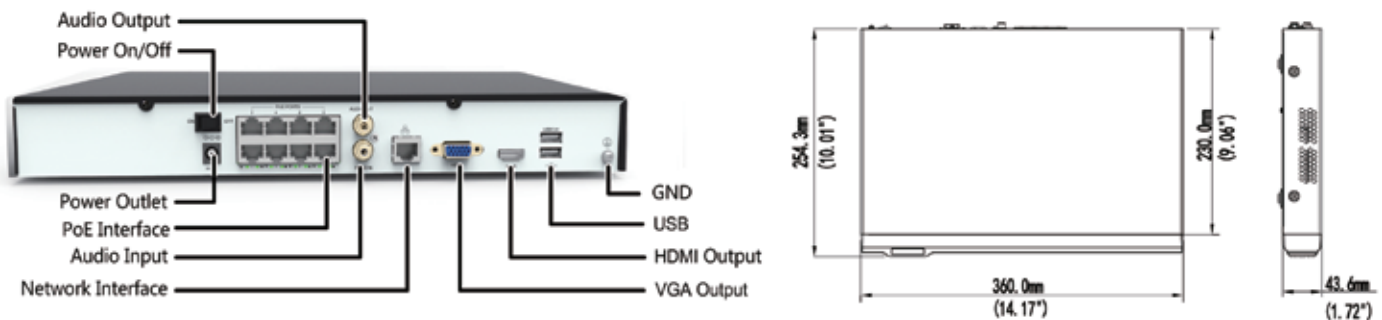

Zhejiang Uniview Technologies Co., Ltd.  
 Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, P. R. China, 310051  
 Website: [www.uniview.com](http://www.uniview.com) Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com)  
 ©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.  
 2015.08 OM-150825-OWN V3.0